

BT-CAN

CAN to Bluetooth adapter


This module is used to connect to remote devices via Bluetooth.



Module parameters

Parameter name	Value
Power supply	11.5 ... 27.5 V DC from CAN or PS
Max current(24V)	30 mA
Max BT distance	220 m
Bus type	CAN (4-wire)
Equipment installation type	Free
Case material	ABS
Protection	IP40
Temperature range	-10 ... +50 °C
Size	45x42x14 mm
Weight	25 g


Connection example

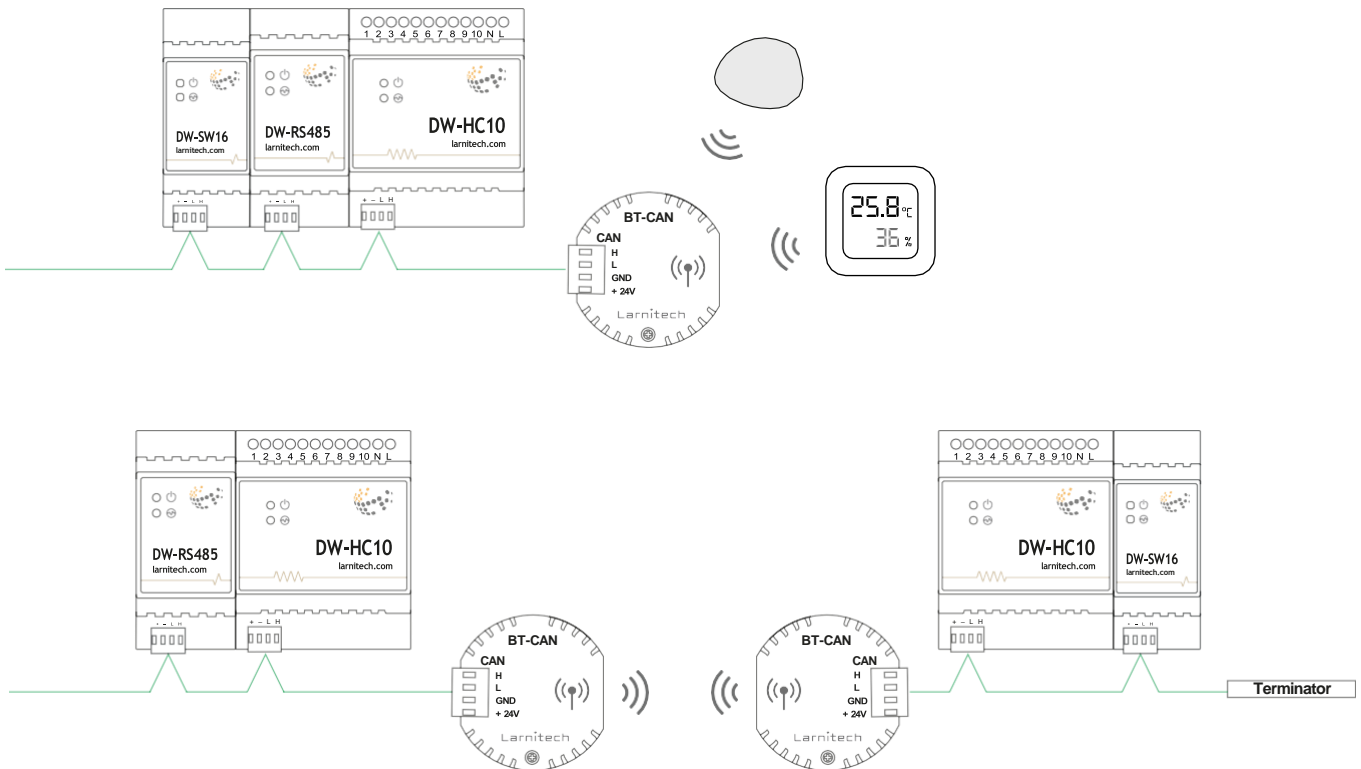

FW-WL

ON-THE-FLOOR LEAKAGE SENSOR

The sensor is placed on the Floor surFace. It has an alarm light, which changes From green to red iF the sensor detects water on the Floor. Used together with DW-WL02 or BW-LSA modules.



Module parameters

Parameter name	Value
Power supply	9...12 V DC
Max current	20 mA
Compatible with	Metafora devices Metafora cloud devices DW-WL02/HTxx BW-LSA
Mounting	Free
Case material	ABS
Protection	IP64
Temperature range	-10 ... +50 °C
Size	57x47x22 mm
Weight	35 g

FEATURES

- Sensor presence detection
- Customizing the indication colors
- Adjusting the sensor sensitivity
- Connections of several sensors to one bus

Connection example

