

DW-BC03

3-CHANNEL MODULE FOR BLINDS MOTOR CONTROL

This module provides control of curtains, projector screens, valves or other electrical motors.




FEATURES

- Supported load types:
 - curtains with force/low-current control
 - 1 / 2 pole valves
- Overcurrent protection
- Built-in current sensor

Module parameters

Parameter name	Value
Output channels qty	3
Input voltage	0-250 V AC/DC
Current type	AC/DC
Max load per channel	5 A
Power supply	11.5 ... 27.5 V DC from CAN
Max current(24V)	55 mA
Connection type	CAN
Permissible section of power supply cable to connect in socket:	
single-conductor cable	0.5 ... 4mm ²
multiple-conductor cable	0.5 ... 4mm ²
tipped multiple-conductor cable	0.5 ... 2.5mm ²
Bus type	CAN (4-wire)
Equipment installation type	DIN-rail (EN 60715)
Case material	ABS
Protection	IP40
Temperature range	-10 ... +50 °C
Size	4U, 69x110x58 mm
Weight	85 g

• DIN railequipment •

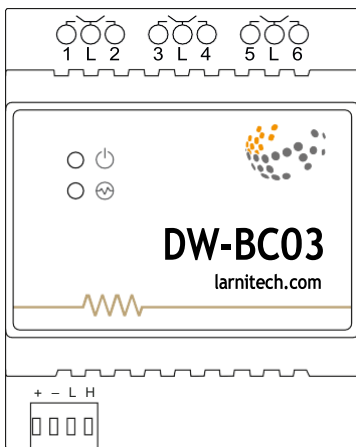

Connection example

