



Catálogo *Productos*

VIVALDI

Índice

Carril DINPágina 4-51

A25SBTC	5
AL10B	7
AL2B	9
AL3B	11
AL5B	13
AL6B	15
AL7B	17
AL8	19
AL9B	21
E30S	23
E80S	25
KEYSOL-DIN	27
MATRIX6	30
P30S	34
P40SL	36
P80S°	38
TELEMACO	40

Accesorios

Página 44-51

C4IO	44
PBT	47
TVM	48
TVS	50

Altavoces techoPágina 52-66

Pasivos

Página 53-58

ROUND13F	53
ROUND5T	55
ROUND6Y	57

Autoamplificados

Página 59-66

KEYROUND16AF	59
KEYROUND16AF.R	63

Reproductores streamingPágina 67-78

Previos	Página 68-71
KEYSOL	68
Amplificados	Página 72-74
KEYSOL-15S	72
Táctil amplificado	Página 75-78
FREETOUCH	75

Altavoces exteriorPágina 79-131

Pasivos	Página 80-107
ZEN315	80
ZEN315L	82
ZEN315T	84
ZEN510	86
ZEN520T	88
ZEN730	90
ZEN730L	92
ZEN730T	94
ZEN780	96
ZEN780A	98
ZEN930	100
ZEN930T	102
ZEN980	104
ZEN980A	106
Accesorios pasivos	Página 108-110
KBOX	108
Autoamplificados	Página 111-128
KEYGREEN16A	111
KEYROCK20A	113
KEYZEN315A	116
KEYZEN510A	118
KEYZEN730A	121
SUPERZEN	123
MOONLIGHT	125
EARTHSOUND	127

Altavoces paredPágina 129-131

Previos	Página 130-131
ANNA10T	130

Carril DIN



25+25W RMS power stereo amplifier, with analog audio input and integrated Bluetooth source.

Supplied with standard or custom PIN (PIN code programmed at the factory: name max 30 characters, password max 4 numbers) to be communicated when ordering.

Mono/stereo function selectable from DIP switch.

Select volume control mode from DIP switch. Internal volume (trimmer) or external potentiometers (mono ##Vivaldi Giove TVM##, stereo [Vivaldi Giove TVS](#)).

The built-in bluetooth source takes priority over the signal coming from the input. Built-in audio detector sensitivity adjustment.

STATUS LED:

Blue: Bluetooth Active

Green: presence of music signal

Red: Ignition

BUTTONS: play, pause

TECHNICAL DATA:

1x Clamp Local audio input (stereo) and 24Vdc power supply.

1x speaker connection terminal 25W @ 4-80hm per channel (minimum impedance 4Ω/channel).

2x terminals connection external remote potentiometer.

1x SMA connector for external bluetooth antenna and(if installed not in the room, but in a technical room).

Input sensitivity control depending on the type of external source.

Power supply via [Vivaldi Giove AL3B](#) (not included).

Current 1,2A.

Size (WxHxD) 54x90x63 mm (3 Modules).

Weight 0.10 Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Giove A25SBTC





DIN rail power supply.

Input 100-240 Vac 50/60Hz 2,8A

Output 36 Vdc 6,6A, 240W.

Dimensions 65x126x110 mm (WxHxD).

Weight 1,1 Kg.

Black

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (2 modules)
Input 100-240 Vac 50-60Hz 0,80A
Output 24 Vdc 1,25A. 30W.
Black colour
Dimensions 34x57x90 mm (WxHxD)
Weight 0,18 Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (4,5 modules)

Input 100-240 Vac 50-60Hz 1,8A

Output 24 Vdc 2,5A. 60W.

Black Colour

Size: 80x100x60 mm (WxHxD)

Weight 0,3 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (5,5 modules DIN)

Input 100-240 Vac 50Hz 1,2A

Output 24 Vdc, 4,16A, 100W

Colour black.

Dimensions: 99x93x56 mm (WxHxD)

Weight 0,29 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (6 modules)

Input 100-240 Vac 50Hz 1,8A

Output 24 Vdc 6,25A, 150W

Black colour

Dimensions 103x58x90 mm (WxHxD)

Weight 0,35 Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply.

Input 100-240 Vac 50/60Hz 2,8A

Output 24 Vdc 10A, 240W.

Dimensions 65x126x110 mm (WxHxD).

Weight 1,1 Kg.

Black

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (4 modules, installation from rear panel).

Input 100-240 Vac 50-60Hz 3,3A.

Output 24 Vdc 5A, 120W.

Dimensions 65x126x110 mm (WxHxD).

Weight 1,1 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DIN rail power supply (6 modules)
Input 100-240 Vac 50Hz 1,8A
Output 36 Vdc 4,17A, 150W
Black colour
Dimensions 103x58x90 mm (WxHxD)
Weight 0,35 Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



DSP stereo amplifier.

D - class power ampl 30+30W @ 80hm, 50+50 @ 40hm.

Balance stereo input.

Amplifier output customisable as below:

- Linear stereo with volume adjustment for single channel, internal with trimmer or external with potentiometers (mono [Vivaldi Giove TVM](#), stereo [Vivaldi Giove TVS](#));
- Subwoofer mode with cut frequency adjustment and trimmer volume.
- Balance stereo line output for active subwoofer connection or auxiliar amp [Vivaldi MULTIMEDIA E30S](#), ##Vivaldi MULTIMEDIA E80S##;
- Possibility to select if linked to the master volume or fixed.
- The device can be set in stereo or mono mode by the dip swich on board.

Power supply 24Vdc via [Vivaldi Giove AL5B](#) (not included)

Standard DIN (6 modules)

Size (WxHxD): 106x90x63 mm

Weight 0.14 kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice





DSP stereo amplifier.

Class - D power amp. 80+80W @ 80hm, 140+140 @ 40hm.

Balanced stereo input.

Amplifier output customisable as below:

- Linear stereo with volume adjustment for single channel, internal with trimmer or external with potentiometers (mono [Vivaldi Giove TVM](#), stereo [Vivaldi Giove TVS](#));
- Subwoofer mode with cut frequency adjustment and trimmer volume.
- Balance stereo line output for active subwoofer connection or auxiliar amp [Vivaldi MULTIMEDIA E30S](#), [Vivaldi MULTIMEDIA E80S](#);
- Possibility to select if linked to the master volume or fixed.
- The device can be set in stereo or mono mode by the dip switch on board.

Power supply 36Vdc via [Vivaldi Giove AL9B](#) (not included)

Standard DIN (6 modules)

Size (WxHxD): 106x90x63 mm

Weight 0.14 kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice







MEDIACENTER AUDIO DIN BAR

WIFI MULTIMEDIA SOURCE

Play music from the internet (Webradio, Spotify ...), from USB or from your devices.

Download the VIVALDI App for free on Play Store and App Store.

MULTIROOM

Enjoy your music anywhere! Using multiple KEYSOL-DIN devices you can synchronize music or make each room independent. You can also sync a local source.

MULTISOURCE Streaming

audio from your smartphone or tablet, web radio, network storage (NAS). Stream audio from your smartphone or tablet, Airplay function, DLNA.

FREE APPLICATION

With the VIVALDI App you can play, control, share playlists directly from your device (smartphone, tablet ..).

SIMPLE TO USE

Install KEYSOL-DIN. Connect to the WiFi network. Download the free App from Play Store or Apple Store.

Release your music world!

TECHNICAL FEATURES

VIVALDI

- Free control APP: VIVALDI (compatible with iOS - Android).
- Supports: Airplay, DLNA, WiFi DIRECT.
- Audio formats: AAC/LTP, HE-ACCv1, HE-ACCv2, AMR-NB, AMR, WB, FLAC, MP3, Vorbis, PCM/WAVE, ALAC.
- Network: 1xRJ45 for LAN connection, WiFi Standard: IEEE802.11b, IEEE802.11g, IEEE802.11n.
- Audio inputs: 1x Analog Audio Stereo Unbalanced.
- Audio outputs: 1x Analog Audio Stereo Balanced.
- Internet sources: Spotify, TuneIn, etc.
- Local sources: music residing in your mobile device, streaming from NAS (network disk).
- USB type A on the front for audio playback MP3/WMA/AAC/AAC+/ALAC/FLAC/APE/WAV.
- 1x Power supply clamp 24Vdc (power supply [Vivaldi Giove AL2B](#) included).
- 1x SMA socket for 2.4Ghz antenna connection for WIFI.

How to use:

1. using a single device with a zone source.
2. Use multiple devices for different music on each zone.
3. use multiple devices for the same synchronized music in all zones.

-
- Customization of KEYSOL-DIN device names.
 - Alarm clock management with music.
 - CE, ROHS certifications.
 - DIN standard.
 - Size (WxHxD) 18x90x63 mm (1 Module).
 - Weight 0.10 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images

Vivaldi MULTIMEDIA KEYSOL-DIN



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Multimedia stereo device with DSP and multimedia player embedded for WebRadio, Spotify ecc....

Matrix 6 inputs + 1 source.

VIVALDI supervision and control APP (downloadable from iOS & Android).

API available:

-KNXnet-IP (KNX IP mandatory Router is not provided)

-Protocollo MQTT 3.1 (through external Broker or integrated)

-REST-API (HTTP GET/POST)

6x SELECTABLE MIC/LINE INPUTS with activable Phantom (24Vdc), assignable priority (can be activated with contact).

USB Type A on the front for MP3/WMA/AAC/AAC+/ALAC/FLAC/APE/WAV audio file playback.

3-band equalizer.

Outputs for power expansions [Vivaldi MULTIMEDIA E30S](#), [Vivaldi MULTIMEDIA E80S](#) or power amps Vivaldi Ulisse Line at 8Ω or 100V.

1x RJ45 per LAN.

1x PATCH cable 1mt.

Audio parameter control with volume/settings/... from webpage. Can be integrated with home automation systems [Vivaldi Domotica iCONTROL4.1L](#), [Vivaldi Domotica iCONTROL4.0+](#) via LAN.

Power Supply 24Vdc via [Vivaldi Giove AL2B](#) (not included).

DIN standard (6 modules).

Dimensions (WxHxD): 106x90x63 mm.

Weight 0.2 Kg.


Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images

Vivaldi Multimedia MATRIX6



VIVALDI

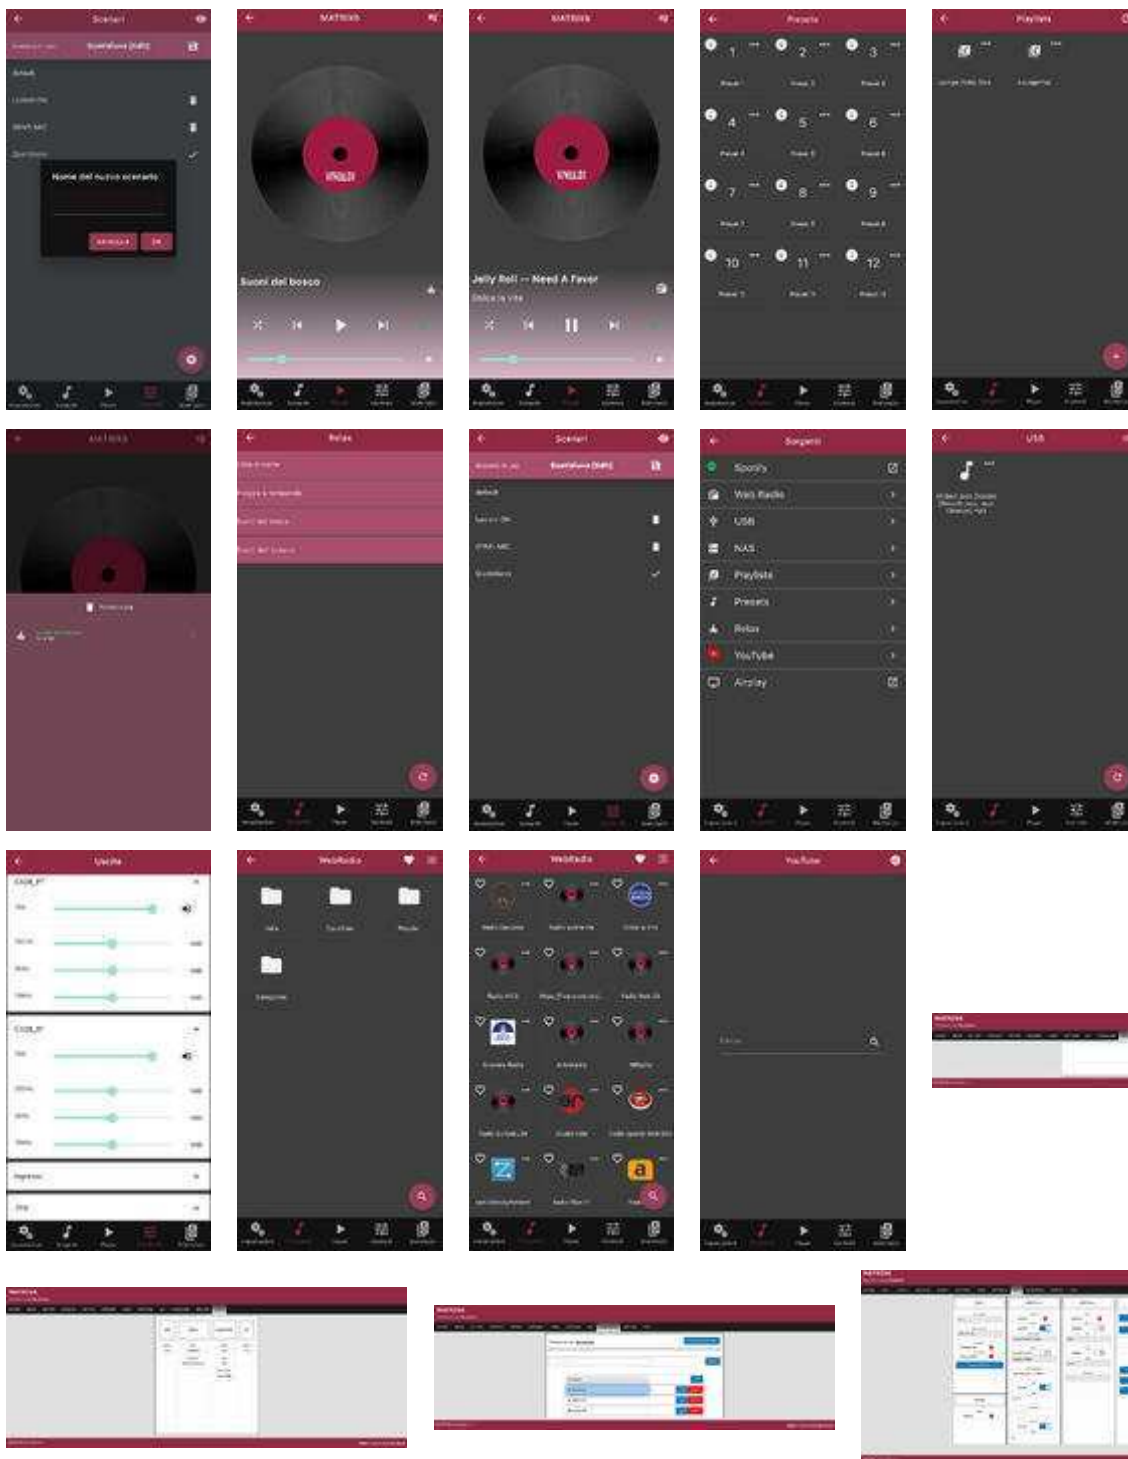

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Multimedia stereo device with built-in multimedia player for WebRadio, Spotify ecc...

DSP amplified mixer with 4-channel mono + 1 stereo or 3 stereo ch.

Class-D amplifier power 30+30W @ 80hm, 50+50W @ 40hm.

VIVALDI supervision and control APP (downloadable from iOS & Android).

API available:

-KNXnet-IP (KNX IP mandatory Router is not provided)

-Protocollo MQTT 3.1 (through external Broker or integrated)

-REST-API (HTTP GET/POST)

4x SELECTABLE MIC/LINE INPUTS with activable Phantom (24Vdc), assignable priority (can be activated with contact).

USB Type A on the front for MP3/WMA/AAC/AAC+/ALAC/FLAC/APE/WAV audio file playback.

7-band equalizer.

Mono output for active subwoofers.

Stereo output for power expansions [Vivaldi MULTIMEDIA E30S](#), [Vivaldi MULTIMEDIA E80S](#) or power amps Vivaldi Ulisse Line at 8Ω or 100V.

1x RJ45 per LAN.

1x PATCH cable 1mt.

Audio parameter control with volume/settings/... from webpage. Can be integrated with home automation systems [Vivaldi Domotica iCONTROL4.1L](#), [Vivaldi Domotica iCONTROL4.0+](#) via LAN.

Power Supply 24Vdc via [Vivaldi Giove AL5B](#) (not included).

DIN standard (6 modules).

Size (WxHxD): 106x90x63 mm.

Weight 0.2 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Multimedia P30S





Multimedia class-D stereo power amplifier with integrated Keysol WiFi player.

40+40W @ 80hm, 70+70W @ 40hm.

VIVALDI supervision and control APP (downloadable from iOS & Android).

1 LINE INPUT.

1 TOSLINK DIGITAL INPUT and RCA.

1 BALANCED STEREO OUTPUT for power expansions ([Vivaldi Giove A25SBTC](#), [Vivaldi MULTIMEDIA E30S](#), [Vivaldi MULTIMEDIA E80S](#), 8Ω/100V Vivaldi Ulisse Line power amps) or active subwoofers.

1 RJ45 per LAN.

1x 1m PATCH cable.

Audio parameter control with volume/settings from App.

Power supply 24Vdc via [Vivaldi Giove AL5B](#) (not included).

DIN standard (6 modules).

Size (WxHxD): 108x90x63 mm.

Weight 0.25 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI





Multimedia stereo device with built-in multimedia player for WebRadio, Spotify ecc...

DSP amplified mixer with 4-channel mono + 1 stereo or 3 stereo ch.

Class-D amplifier power 80+80W @ 80hm, 140+140W @ 40hm.

VIVALDI supervision and control APP (downloadable from iOS & Android).

API available:

-KNXnet-IP (KNX IP mandatory Router is not provided)

-Protocollo MQTT 3.1 (through external Broker or integrated)

-REST-API (HTTP GET/POST)

4x SELECTABLE MIC/LINE INPUTS with activable Phantom (24Vdc), assignable priority (can be activated with contact).

USB Type A on the front for MP3/WMA/AAC/AAC+/ALAC/FLAC/APE/WAV audio file playback.

7-band equalizer.

Mono output for active subwoofers.

Stereo output for power expansions ##Vivaldi MULTIMEDIA E30S##, ##Vivaldi MULTIMEDIA E80S## or power amps Vivaldi

Ulisse Line at 8Ω or 100V.

1x RJ45 per LAN.

1x PATCH cable 1mt.

Audio parameter control with volume/settings/... from webpage. Can be integrated with home automation systems [Vivaldi Domotica iCONTROL4.1L](#), [Vivaldi Domotica iCONTROL4.0+](#) via LAN.

Power Supply 36Vdc via [Vivaldi Giove AL9B](#) (not included).

DIN standard (6 modules).

Size (WxHxD) 105x65x90 mm.

Weight 0.23 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Multimedia P80S



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Integrated all-in-one multiroom system, complete with amplification and multimedia audio sources compatible with KNX, MQTT, REST.API and home automation third. Management and supervision via Telemaco APP available for iOS & Android. System expandable to 6 players to 12 zones, combining 2 Telemaco.

Inputs:

- 3 stereo inputs unbalanced line level 0db
- Power supply connector
- Micro SD

Outputs:

- 6 amplified outputs (6x20W @ 4ohm)
- 6 line level balanced preamp outputs to expand the number of speakers or power zone via external amplifiers (##Vivaldi Multimedia E30S#, ##Vivaldi Multimedia E80S#, Vivaldi PMA , Vivaldi PSA series power amplifiers, Vivaldi active subwoofers, Vivaldi active speakers)
- 8 Ohm speakers for each output, minimum impedance 4 Ohm

Connectivity:

- KNX connector embedded
- RJ45 LAN 10/100 connector

Player / Users:

4 Players integrated with services

Spotify Connect
Webradio
Airplay
NAS
Local music (Android)
Playlist
AUX

Other:

- Playlist creation and quick access
- Favorite webradio with fast access
- Preset functionality with quick access
- Function Doorbell with choice for single zone do not disturb
- Webpage configuration
- Customizing Player/User names, AUX inputs and zone outputs
- Shortcut access to player/user
- Stereo zone setting (for up to 3 stereo zones or mono/stereo combination)
- Possibility to pair two devices to create a single 12-zones system, 6 AUX inputs, 6 players (maximum 6 stereo zones or mono/stereo combinations)
- Dedicated control app (Vivaldi Telemaco)
- Supported control APIs: KNX, MQTT, REST (with access token)
- Multi-function touch button on the front (DHCP reset, factory reset, static IP...)
- Multi-colored LED status bar.
- Energy saving amplifiers
- OTA updates

Option:

[Vivaldi Multimedia C4IO](#) programmable buttons with 4 inputs. Short or long press multifunction keys to associate two functions to each single Button. The first two inputs (buttons) can be used with rotary encoder ([Vivaldi Multimedia TVE](#) to be ordered separately) for volume control.

Functions assignable to the buttons [Vivaldi Multimedia C4IO](#):

Increase / decrease in volume
Inputs / outputs
Mute and deactivation switch
Preset recall
Forward/backward track player
Stop
Play / Pause player
Play USB (priority)

Cables to be used:

- #Vivaldi Ulisse MICRO2.50## system cable for analog inputs and preout outputs
- Red-black cable 2x0,75 or equivalent for speaker connection and power supply
- LAN cable cat5e/cat6
- KNX bus cable

VIVALDI

Dimensions (WxHxD): 106x91x62mm, 6 DIN modules.

Weight: 0,250 kg

Power supply : 24vdc / 150W max (#Vivaldi Giove AL6B## not supplied)

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Multimedia TELEMACO



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA

Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it

P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Remote control interface for [Vivaldi Multimedia P30S](#), ##Vivaldi Multimedia P80S#, #Vivaldi Multimedia MATRIX6#, #Vivaldi Multimedia TELEMACO#.

WiFi connectivity.

Webpage configuration.

INPUTS

4 button inputs with functions assignable via webpage programming.

Multi-function buttons (short and long press) to associate two functions to each single input.

The first two inputs can be used with rotary encoder (accessory [Vivaldi Multimedia TVE](#)) for volume control via knob.

Functions in combination with [Vivaldi Multimedia P30S](#), [Vivaldi Multimedia P80S](#):

Increment / decreasing volume inputs/ outputs

Mute and deactivation switch

Preset recall

Forward/backward track player

Stop

Play / Pause player

Left and right channel separate volume control

Play USB (priority)

Functions in conjunction with [Vivaldi Multimedia MATRIX6](#):

Increment / decreasing volume inputs/ outputs

Mute and deactivation switch

VIVALDI

Preset recall
Forward/backward track player
Stop
Play / Pause player
Play USB (priority)

Functions in conjunction with [Vivaldi Multimedia TELEMACO](#):

Increment / decreasing volume inputs/ outputs
Mute and deactivation switch
Preset recall
Forward/backward track player
Stop
Play / Pause player

OUTPUTS

4 outputs for 12V LED connection. 3 light modes: fixed, slow flashing, fast flashing. For the following functions:

Mute player status, inputs and outputs
Player playback status
WiFi connection status
Feedback button press

Power supply 110 - 230vac.

Dimensions (WxHxD) 44x44x18 mm.

Weight: 0,033kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Multimedia C4IO



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice





Pair of mono potentiometers with clamp mounted on a hole cap.

Please indicate the desired colour and civil plate when ordering.

Use [Vivaldi Ulisse MICRO2.50](#), [Vivaldi Ulisse MICRO2.100](#), [Vivaldi Ulisse MICRO2.200](#).

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Pair of mono potentiometers with clamp mounted on a hole cap.

Please indicate the desired colour and civil plate when ordering.

Use [Vivaldi Ulisse MICRO2.50](#) [Vivaldi Ulisse MICRO2.100](#), [Vivaldi Ulisse MICRO2.200](#) cable.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

Altavoces techo



In-ceiling round speaker

2 way, Hi-Fi, Frameless design

Woofer 13,5cm (5,25"), kevlar

Tweeter 1,3cm (0,5"), mylar dome, adjustable, Neodymium magnet.

Power 50W RMS.

Musical Power 100W

Suggested amplification: 10-110W RMS

Impedance: 8Ω

Frequency range: 70-20000 Hz

Sensitivity: 87 dB

Max output level full power: 99dB

Dispersion angle 120° (V/O)

Dimensions (Diam.xD): 204x77 mm

Recessed installation hole (D): 177 mm

Weight: 1,20 Kg

Installation on plasterboard, wood walls or similar: no accessories needed, the speaker is provided in the rear with hook-shaped anchors for stable fixing

Installation in-wall (concrete): [Vivaldi Ulisse SR13](#).

White colour RAL 9016, paintable (view, [Vivaldi Giove ROUND13F.R](#))

VIVALDI

Operation temperature: from -20° to +65.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Giove ROUND13F



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Round speaker, in-ceiling.

Woofer: 11 cm full-range

Power 3/6W RMS - 12W, max 103dB.

Transformer voltage: 100V

Frequency response: 100-15000 Hz

Sensitivity: 92 dB $\pm$ 3dB

Dispersion angle: 120° (V/O)

Dimensions (DiamxD): 175x60 mm

Recessed installation hole (D): 150 mm

Weight: 0,5 Kg

Colour: White (RAL9016)

Material: ABS cabinet, metal grill

Operation temperature: from -20° to +65°

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Round speaker, in-ceiling.

Woofer: 15,5 cm, full-range

Power 3/6W RMS - 12W peak, max 104dB.

Transformer voltage: 100V

Frequency response: 100-16000 Hz

Sensitivity: 93 dB $\pm$ 3dB

Dispersion angle: 120° (V/O)

Dimensions (DiamxD): 188x76 mm

Recessed installation hole (D): 170 mm

Weight: 0,7 Kg

Colour: White (RAL9016)

ABS cabinet, metal grill

Operation temperature: from -20° to +65°

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Multimedia WiFi & Bluetooth speakers kit:
1pc KEYROUND16AF speaker with built-in Keysol
1pc ROUND16F

SPECIFICATIONS

n. 01 - KEYROUND16AF MASTER

round MASTER speaker, Frameless design series, semi-flush wall, recessed ceiling.

ACTIVE, 2-way, 2x30W RMS, HI-FI, **with built-in multimedia player Bluetooth WiFi** [Vivaldi WIFI KEYSOL \(black version con Bluetooth\)](#).

Network LAN port for connection (RJ45).

1 auxiliary stereo RCA input for external source.

1 power output for SLAVE speaker (30W RMS).

System power supply 24V, 2.5A (included).

Woofer 16.5 cm.

Titanium adjustable dome tweeter with neodymium magnet 1.9 cm

RMS Power 2x30W

Musical Power 2x60W

Frequency response 60-20000 Hz

Sensitivity 90 dB

Dispersion angle 120° (V / H)

ABS V0 cabinet with painted galvanized protection grille.

Working temperature from -20° to +65°.

Size (DxD) 227x100 mm

Built-in hole (D) 210 mm

Weight 1,8 Kg

n. 01 - ROUND16F SLAVE

Round speaker, 2-way in-ceiling, **HI-FI, Frameless**

Impedance: 8 Ω

Recessed on drywall, wood walls and similar: no accessories need, the speaker is provided with some hooks for stable anchoring in the rear side.

Installation in-wall: not suitable

Colour white RAL 9016, paintable (see [Vivaldi WIFI KEYROUND16AF.R](#)).

ABS V0 cabinet with painted galvanized grille.

Working temperature from -20° to +65°

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice








Images

Vivaldi WIFI KEYROUND16AF




VIVALDI

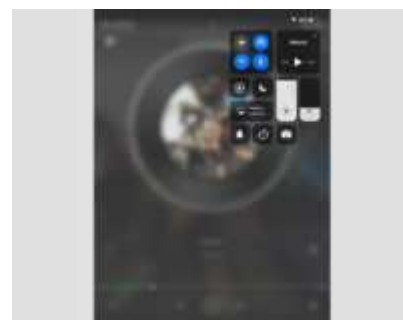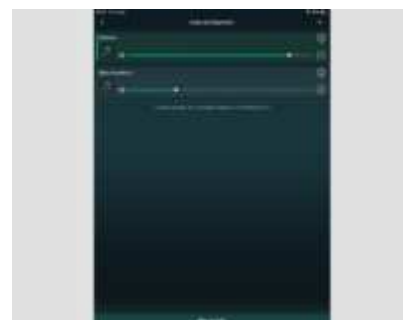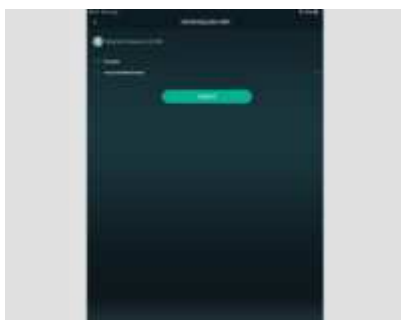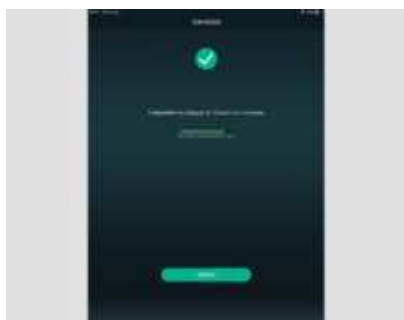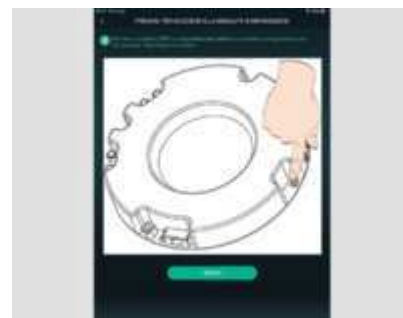

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI

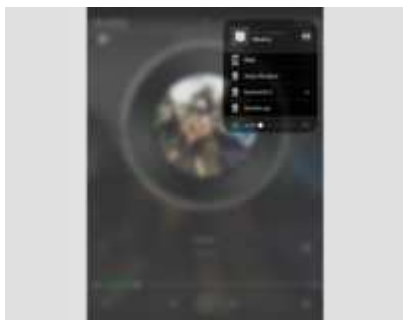

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Multimedia WiFi e Bluetooth speakers kit:

1pc KEYROUND16AF speaker with built-in Keysol multimedia

1pc ROUND16F speaker

SPECIFICATIONS

n. 01 - KEYROUND16AF MASTER

round MASTER speaker, Frameless design series, semi-flush wall, recessed ceiling.

ACTIVE, 2-way, 2x30W RMS, HI-FI, **with built-in multimedia player Bluetooth & WiFi ##Vivaldi WIFI KEYSOL (black version con Bluetooth)##.**

LAN port for network connection (RJ45).

1 auxiliary stereo RCA input for external source.

1 power output for SLAVE speaker (30W RMS).

System power supply 24V, 2.5A (supplied).

Woofer 16.5 cm 1.9 cm swinger with adjustable dome, titanium, neodymium magnet

RMS Power 2x30W

Musical Power 2x60W

Frequency response 60-20000 Hz

Sensitivity 90 dB

Dispersion angle 120° (V / H)

VIVALDI

Cabinet ABS V0 with painted galvanized protection grid.

Working temperature from -20° to +65°.

Size (DxD) 227x100 mm

Built-in hole (D) 210 mm

Weight 1,8 Kg

n. 01 - ROUND16F SLAVE

Round speaker SLAVE, 2-way, recessed ceiling, **HI-FI, Frameless**

Impedance: 8 Ω

Recessed on drywall, wood walls and similar: no accessories are needed, the speaker is provided in the rear side with some hooks for stable anchoring

Installation in-wall: not suitable

Colour on request.

Cabinet ABS V0 with painted galvanized grille

Working temperature from -20° to +65°

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi WIFI KEYROUND16AF.R






Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA

Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it

P.IVA e C.F. 02880360272



VIVALDI

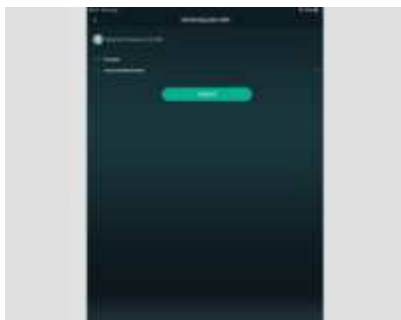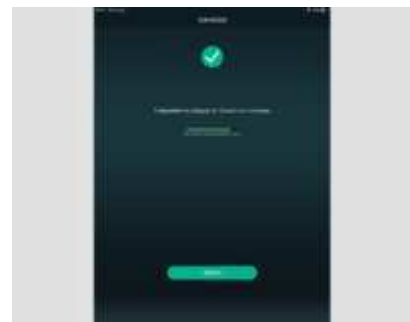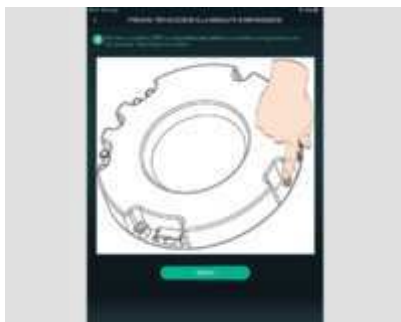

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI

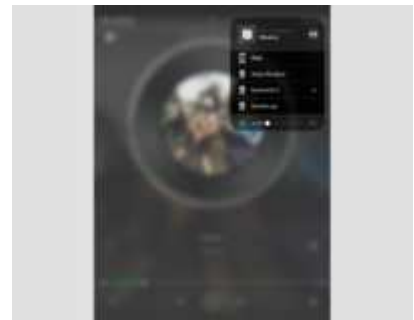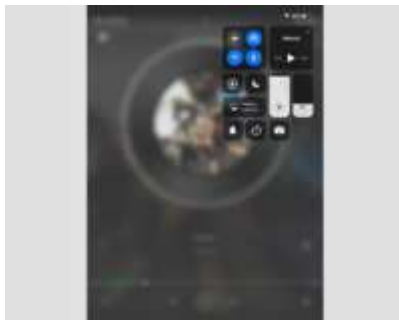

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

Reproductores streaming



Vivaldi WIFI KEYSOL (black version con Bluetooth)



MEDIACENTER AUDIO

MULTIMEDIA SOURCE WIFI AREA WITH BLUETOOTH

Play music from your devices, download the free App!

MULTIROOM

Enjoy your music anywhere! Using multiple KEYSOL devices can sync music or make each room independent.

MULTI-SOURCE

Stream audio from your smartphone or tablet, web radio, network storage (NAS). Stream audio from your smartphone or tablet, Airplay function, DLNA.

FREE APPLICATION

With the KEYSOL App you can play, control and share playlists directly from your device (smartphone, tablet.).

EASY TO USE

Install the KEYSOL.

Connect to the WiFi network.

Download the free App from the Play Store or Apple Store.

Free your musical world!

TECHNICAL FEATURES

- Built-in Bluetooth receiver visible only when selected from the APP, visible on the device as "Vivaldi_Keysol" (has no PIN).
- FREE CONTROL APP: GIOVE KEYSOL (compatible with iOS - Android).
- Supports: Airplay, DLNA, WiFi DIRECT.
- Audio formats: AAC/LC/LTP, HE-AACv1, HE-AACv2, AMR-NB, AMR, WB, FLAC, MP3, Vorbis, PCM/WAVE, ALAC.
- Network: 1xRJ45, WiFi Standard: IEEE802.11b, IEEE802.11g, IEEE802.11n.
- Audio Inputs: 1x Analog Audio Input.
- Audio Outputs: 1x Analog Audio Output.
- Internet sources: Spotify, tunein, etc.
- Local sources: music residing on your mobile device, streaming from NAS (network disk).
- 3 How to use:
 1. One song-One Room: use of a single device.
 2. One song-Multiple Rooms: use of multiple devices for different music in all zones.
 3. One song-All Rooms: use multiple devices for the same music synchronized in all zones.
- Customizing KEYSOL device names.
- Alarm management with music on the network.
- Power Input: Micro USB 5V, 300ma.
- Certifications: CE, ROHS.
- Dimensions: 115x20x95 mm (WxHxD).
- Black colour.
- Weight: 0.18kg.

Notes: available on request .apk files of the APP compatible with previous Android versions.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi WIFI KEYSOL (black version con Bluetooth)



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



MEDIACENTER ACTIVE AUDIO

MULTIMEDIA WIFI SOURCE AND BLUETOOTH

HiFi Stereo 15W+15W RMS (30+30W musical)

Play music from the internet (Webradio, Spotify ...), Bluetooth, Airplay, USB or from your devices.

Download the free VIVALDI App on the Play Store and App Store.

MULTISOURCE Streaming

audio from your smartphone or tablet, web radio, network storage (NAS). Stream audio from your smartphone or tablet, Airplay function, DLNA, Bluetooth.

FREE APPLICATION

With the VIVALDI App you can play, control, share playlists directly from your device (smartphone, tablet ..).

SIMPLE TO USE

Install KEYSOL-15S. Connect to the WiFi network. Download the free App from Play Store or Apple Store. Release your music world!

TECHNICAL FEATURES

- Active 15+15W.
- Free control APP: VIVALDI (compatible with iOS - Android).
- Supports: Airplay, DLNA, WiFi DIRECT, BLUETOOTH.

VIVALDI

- Bluetooth name "VIVALDI-KEYSOL".
- Audio formats: AAC/LC, HE-AACv1, HE-AACv2, AMR-NB, AMR, WB, FLAC, MP3, Vorbis, PCM/WAVE, ALAC.
- Network: 1xRJ45 for LAN connection, WiFi Standard: IEEE802.11b, IEEE802.11g, IEEE802.11n.
- Audio Inputs: 1x Analog Audio Input (Mini Jack Stereo 3.5mm).
- Audio Outputs: 1x Analog Audio Stereo Output (Mini Jack Stereo 3.5mm).
- Internet sources: Spotify, TuneIn, etc.
- Amplified audio outputs 15W+15W for connecting 4 or 8 Ohm speakers.
- Local sources: music in your mobile device, streaming from NAS (network disk).
- USB type A on the front for audio file playback MP3/WMA/AAC/AAC+/ALAC/FLAC/APE/WAV.
- 1x 15Vdc 2A power connector (power supply included).
- Dimensions 86x20x86 mm (WxHxD).
- Weight 0.10 kg.
- Alarm clock function with music.
- Certifications: CE, ROHS.
- Remote control included

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images


Vivaldi MULTIMEDIA KEYSOL-15S



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI

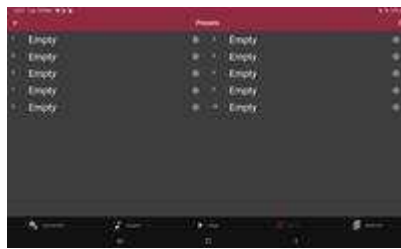

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



MULTIMEDIA audio all-in-one TOUCH device, with VIVALDI supervision and control APP or via [Vivaldi Domotica iCONTROL4.0+](#), [Vivaldi Domotica iCONTROL4.1L](#).

Made in Italy, HiFi Stereo 20W+20W RMS (40+40W music).

OPERATING MODES:

- 1 stereo zone;
- 1 stereo zone + Subwoofer;
- 1 stereo zone + Subwoofer + 1 mono zone with power expansion;
- 2 stereo zones, one amplified and one with power expansion;
- 4 mono zones, two amplified and two with power expansion;
- Multiroom (connection via local network of several [Vivaldi Giove FREETOUCH](#) devices for audio synchronisation of player or auxiliary inputs);
- Intercom (connection via LAN of multiple [Vivaldi Giove FREETOUCH](#) devices for selective microphone calls or groups);

FEATURES:

- 5" display, 800x480px;
- HFP (Hands Free) profile: in Bluetooth source Hands-free function for the smartphone;
- Audio player for playback: AirPlay 2 (audio streaming. For example: YouTube, Apple Music, Amazon Music...), Spotify, Webradio, MicroSd-card, Nas;
- 2 Microphones for two-way stereo communication;
- 7-band graphic equaliser;

- Integrated DSP (Digital Signal Processor);
- Control and supervision via protocols:
 - MQTT
 - REST.API
 - KNX.TP
- Connectable devices (management by touch screen):
 - [Vivaldi Multimedia TELEMACO](#)
 - [Vivaldi Multimedia P30S](#)
 - [Vivaldi Multimedia P80S](#)
 - [Vivaldi Multimedia MATRIX6](#)

ACCESSORY DEVICES:

[Vivaldi Multimedia C4IO](#) with 4 programmable inputs. Multi-function short or long press buttons to associate two functions with each individual button. The first two inputs (buttons) can be used with rotary encoder ([Vivaldi Multimedia TVE](#) to be ordered separately) for volume control.

CONNECTIONS:

- 1x terminal for 24Vdc power supply ([Vivaldi Giove AL3B](#), [Vivaldi Giove AL5B](#) or [Vivaldi Giove AL8](#));
- 1x 8Ω passive speaker connection terminal, two configurable channels (minimum impedance 4Ω);
- 1x pre-amplified output, two configurable channels (unbalanced line signal);
- 2x unbalanced stereo analogue inputs for external sources e.g. TV, computer, etc.; 1x RJ45 connector for network connection;
- 1x RJ45 connector for connection to local LAN 10/100Mbps;
- 1x KNX TP connector;

TECHNICAL DATA:

- Stereo amplified output 2x20W RMS @ 8Ω and 2x30W RMS @ 4Ω;
- Pre-amplified stereo output;
- LAN connection 10/100Mbps; Wi-Fi: 802.11 b/g/n;
- Stereo microphone for intercommunication;
- Power supply: 24Vdc Max. 2.5A;
- Aluminium cabinet, glass display;

Other Functions:

- Presets for device configuration;
- Presets for playlist playback;
- High-pass filter for amplified audio output and low-pass filter for pre-amplified audio output Sub;
- Amplifier power-saving function, which can be activated;
- Automatic on/off function depending on the presence of a signal at the AUX1 or AUX2 input;
- Microphone for ambient listening (children, disabled, elderly..) or calls to other devices connected to the same network;
- Standby screen, selectable.
- Microphone with automatic volume sensitivity.
- Clock and alarm clock with programmable timer function for automatic switching on and/or off (e.g. Alarm and Sleep function).
- Integrated amplifier can be switched off.
- Adjustable maximum volume.

VIVALDI

- Firmware update via Internet (OTA);

Prepared for wall mounting box via 503, 504 or D60 box.

Power supply via [Vivaldi Giove AL3B](#), [Vivaldi Giove AL5B](#), [Vivaldi Giove AL8](#).

Dimensions (WxHxD) 135x92x44mm.




Weight 0.25Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images


Vivaldi Giove FREETOUCH

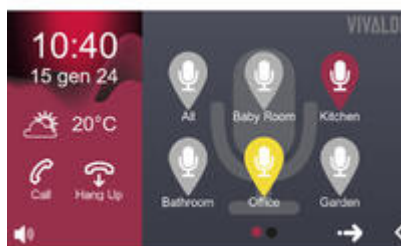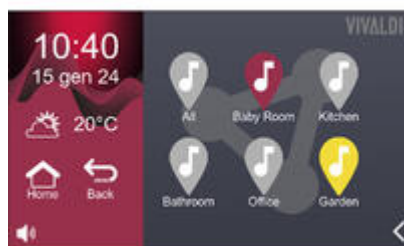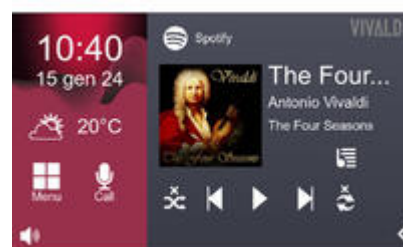

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI

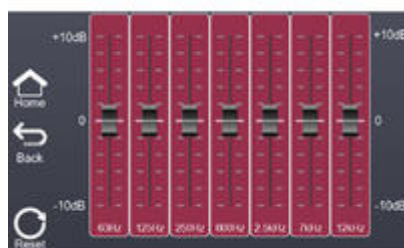

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

Altavoces exterior



Design speaker, HiFi, 2 ways, Stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens and swimming pools).

Woofer: 16,5 cm

Tweeter dome: 2,5 cm

Power 8 Ω : 50W RMS, 100W musical.

Impedance 8 Ohm.

Frequency response: 60 - 20000 Hz

Sensitivity: 89 dB

Dimensions: 205 x 315 mm (DxH)

Floor install flange 30 cm (D).

Anchor holes n. 3.

Weight: 7 Kg

Colour: brushed steel

Custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice





High design with LED light for outdoor use (roofs, gardens and swimming pools).

LED technology

66 LED module

Power: 13,8W

Lumen:1380

Temperature 3800K

Power supply: 240Vac

Dispersion: 360°

Dimensions: 205 x 315 mm (DxH)

Floor install flange 30 cm (D).

Anchor holes nr. 3.

Weight: 4 Kg

Colour: opal white

custom colours available on demand

Protection grade: IP65

Note: It is possible to customize LED colours and integrate the management from ##Vivaldi Giove iCONTROLLight##, ##Vivaldi Giove iCONTROL+##.

VIVALDI

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN315L



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Design speaker, HiFi, 2 ways, Stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens and swimming pools).

Woofer: 16,5 cm

Tweeter dome: 2,5 cm

Power rating: 50W, 100W peak.

Impedance 100 V

Frequency response: 60 - 20000 Hz

Sensitivity: 89 dB

Dimensions: 205 x 315 mm (DxH)

Weight: 7 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Design speaker, with LED light integrated, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens and swimming pools).

66 LED module - 13,8 W - 1380 Lm - 3800K

Woofer: 16,5 cm

Tweeter dome: 2,5 cm

Power 8 Ω : 50W RMS, 100W musical.

Impedance: 8 Ohm

Frequency response: 60 - 20000 Hz

Sensitivity: 89 dB

Dimensions: 205 x 510 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight: 8,2 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65


Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

VIVALDI



Images

Vivaldi Design ZEN510

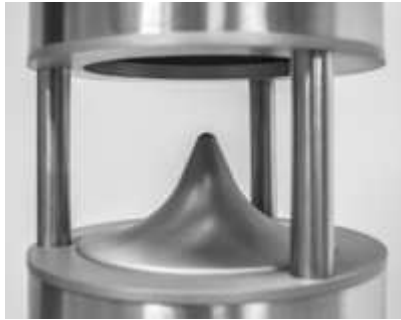

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Design speaker, with LED light integrated, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens and swimming pools).

66 LED module - 13,8 W - 1380 Lm - 3800K

Woofer: 16,5 cm

Tweeter dome: 2,5 cm

Power rating: 50W, 100W peak

Impedance: 100V

Frequency response: 60 - 20000 Hz

Sensitivity: 89 dB

Dimensions: 205 x 510 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight: 8,2 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

VIVALDI



Images

Vivaldi Design ZEN510T



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Design speaker, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens and swimming pools).

Woofer 16,5 cm

Tweeter 2,5 cm compression

Power 8 Ω : 100W RMS, 200W musical.

Impedance: 8 Ohm

Frequency response: 60 - 20000 Hz

Sensitivity: 90 dB

Dimensions: 205 x 725 mm (DxH)

Floor install flange 30 cm (D).

Anchor holes n.3

Weight 12,5 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

VIVALDI



Images

Vivaldi Design ZEN730



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design with Led light for outdoor use (roofs, gardens, swimming pools).

Led technology

66 Led Light

Watt 13,8

Lumen 1380

Temperature 3800K

Power supply 240 Vac

Dispersion: 360°

Dimensions: 205 x 730 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight: 7 Kg

Colour: opal white

custom colours available on demand

Protection grade: IP65

Note: It is possible to customize LED colours and integrate the management from ##Vivaldi Giove iCONTROLLight##, ##Vivaldi Giove iCONTROL+## .

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN730L





High design speaker, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces.

Woofer: 16,5 cm

Tweeter compression: 2,5 cm

Power rating: 50W, 100W peak.

Impedance: 100 V

Frequency response: 60 - 20000 Hz

Sensitivity: 90 dB

Dimensions: 205 x 725 mm (DxH)

Weight: 12.5 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design speaker, HiFi, 3 ways, stainless steel 316L, IP65, with subwoofer integrated for sound and design of outdoor spaces (roofs, gardens, swimming pools).

Subwoofer 2x16,5 cm push-pull.
Mid-woofer da 16,5cm.
Tweeter 34mm compression
Power 300W RMS.
Musical Power 600W
Peak power 1200W.
Impedance: 4 Ohm
Frequency response: 40 - 20000 Hz
Sensitivity: 91 dB
Max output level full power 114dB.
Dimensioni 205 x 995 mm (DxH).
Floor install flange 30 cm (D)
Anchor holes n.3
Weight 19,5 Kg
Colour: brushed steel
custom colours available on demand
Protection grade: IP65


VIVALDI

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN780

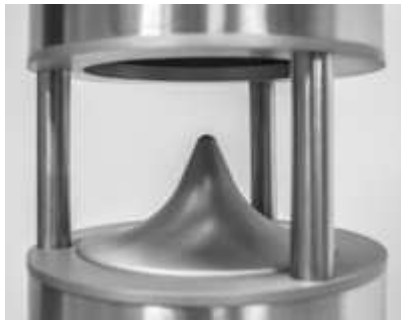

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design speaker, HiFi, 600W, 3 ways with DSP, stainless steel 316L, IP65, with subwoofer integrated for sound and design of outdoor spaces (roofs, gardens, swimming pools).

Subwoofer 2x16,5 cm push-pull.
Mid-Woofer from 16,5cm.
Tweeter: 34mm compression driver.
Woofer power 300W RMS.
Midrange power 150W.
Tweeter power 150W
Frequency response: 40 - 20000 Hz
Max output level full power 114dB.
Input sensitivity: 1V RMS
Power supply: 220V/50-60Hz
Dimensions: 205 x 995 mm (DxH)
Floor install flange 30 cm (D)
Anchor holes n.3
Weight 19,5 Kg
Colour brushed steel
Custom colour available on demand
Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN780A





High design speaker, with Led light integrated, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens, swimming pools).

66 Led module - 13,8 W - 1380Lm - 3800K

Woofer: 16,5 cm

Compression Tweeter: 2,5 cm

Power 8 Ω : 100W RMS, 200W musical.

Impedance: 8 Ohm

Frequency response: 60 - 20000 Hz

Sensitivity: 90 dB

Dimensions: 205 x 930 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight: 14.2 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

VIVALDI

 Images

Vivaldi Design ZEN930



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design, with LED light integrated, HiFi, 2 ways, stainless steel 316L, IP65, for sound and design of outdoor spaces (roofs, gardens, swimming pools).

Light: 66 LED - 13,8W, 1380lm, 3800K

Woofer: 16,5 cm

Compression Tweeter: 2,5 cm

Power rating: 50W, 100W peak

Impedance: 100V

Frequency response: 60 - 20000 Hz

Sensitivity: 90 dB

Dimensions: 205 x 930 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight 14,2 Kg

Colour: brushed steel

custom colours available on demand

Protection grade: IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

VIVALDI



Images

Vivaldi Design ZEN930T



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design speaker, with Led light integrated. HiFi, 3 ways, stainless steel 316L, IP65, subwoofer for sound and design of outdoor spaces (roofs, gardens and swimming pools).

Light: 66 LED - 13,8W, 1380lm, 3800K

Subwoofer: 2x16.5 cm push-pull

Mid-woofer: 16,5 cm

Tweeter: 34mm compression

Power 300W RMS

Musical power 600W

Peak power 1200W

Impédance 4 Ohm

Frequency response 40 - 20000 Hz

Sensitivity: 91 dB

Max output level 114dB

Dimensions: 205 x 1200 mm (DxH)

Floor install flange 30 cm (D)

Anchor holes n.3

Weight 20 Kg

Colour brushed steel

Custom colours available on demand

VIVALDI


Protection grade IP65

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN980

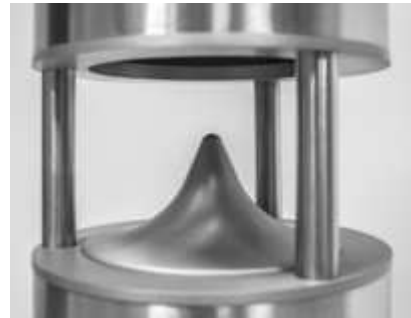

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



High design speaker, with light integrated, HiFi, 600W, ACTIVE, 3 way with DSP, stainless steel 316L, IP65, subwoofer for sound and design for outdoor spaces integrated (roofs, gardens and swimming pools).

66 Led, 13,8W, 1380lm, 3800K
Subwoofer 2x16,5 cm push-pull
Mid-woofer 16,5 cm
Tweeter 34mm compression
Woofer power 300W RMS
Midrange power 150W
Tweeter power 150W
Frequency response 40-20000Hz.
Max output level full power 114dB.
Input sensitivity: 1V RMS
Power supply: 220V/50-60Hz
Dimensions: 205 x 1200 mm (DxH)
Floor install flange 30 cm (D)
Anchor holes n.3
Weight 20 Kg
Colour brushed steel
Custom colours available on demand

Protection grade IP65


Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Design ZEN980A



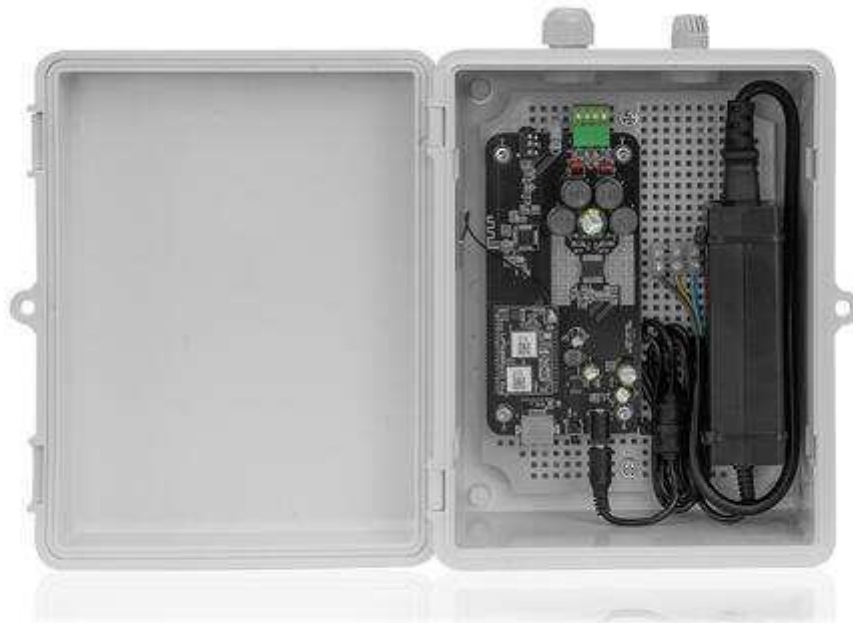

Bluetooth and WiFi multimedia amplifier with integrated multimedia player.

With input for external source and outputs for 1 or 2 speakers.

Music streaming, playback and controls via **VIVALDI APP**.

TECHNICAL FEATURES

- Built-in Bluetooth receiver.
- Built-in WiFi receiver.
- Free control APP: Vivaldi APP (compatible with iOS - Android).
- Supports: Airplay, DLNA, WiFi DIRECT.
- Audio formats: AAC/LC, HE-AACv1, HE-AACv2, AMR-NB, AMR, WB, FLAC, MP3, Vorbis, PCM/WAVE, ALAC.
- Network: 1xRJ45, WiFi Standard: IEEE802.11b, IEEE802.11g, IEEE802.11n.
- Audio Input: 1x Analog stereo minijack.
- **Audio Output: Stereo power amplifier class-D 40+40W @ 8-16ohm, not compatible with 4ohm speakers.**
- **Internet sources: Spotify, Youtube, Tunein, etc.**
- Local sources: music residing on your mobile device, streaming from NAS (network disk).
- 3 How to use:
 1. One song-One Room: use of a single device.
 2. One song-Multiple Rooms: use of multiple devices for different music.
 3. One song-All Rooms: use multiple devices for the same synchronized music.
- 24vdc power supply included.
- IP65 watertight enclosure, for outdoor installation.


VIVALDI

- Colour: grey.
- 3x supplied cable glands.
- Certifications: CE, ROHS.
- Dimensions (WxHxD): 180x230x120 mm.
- Weight 0.45 Kg.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images

Vivaldi WiFi KBOX

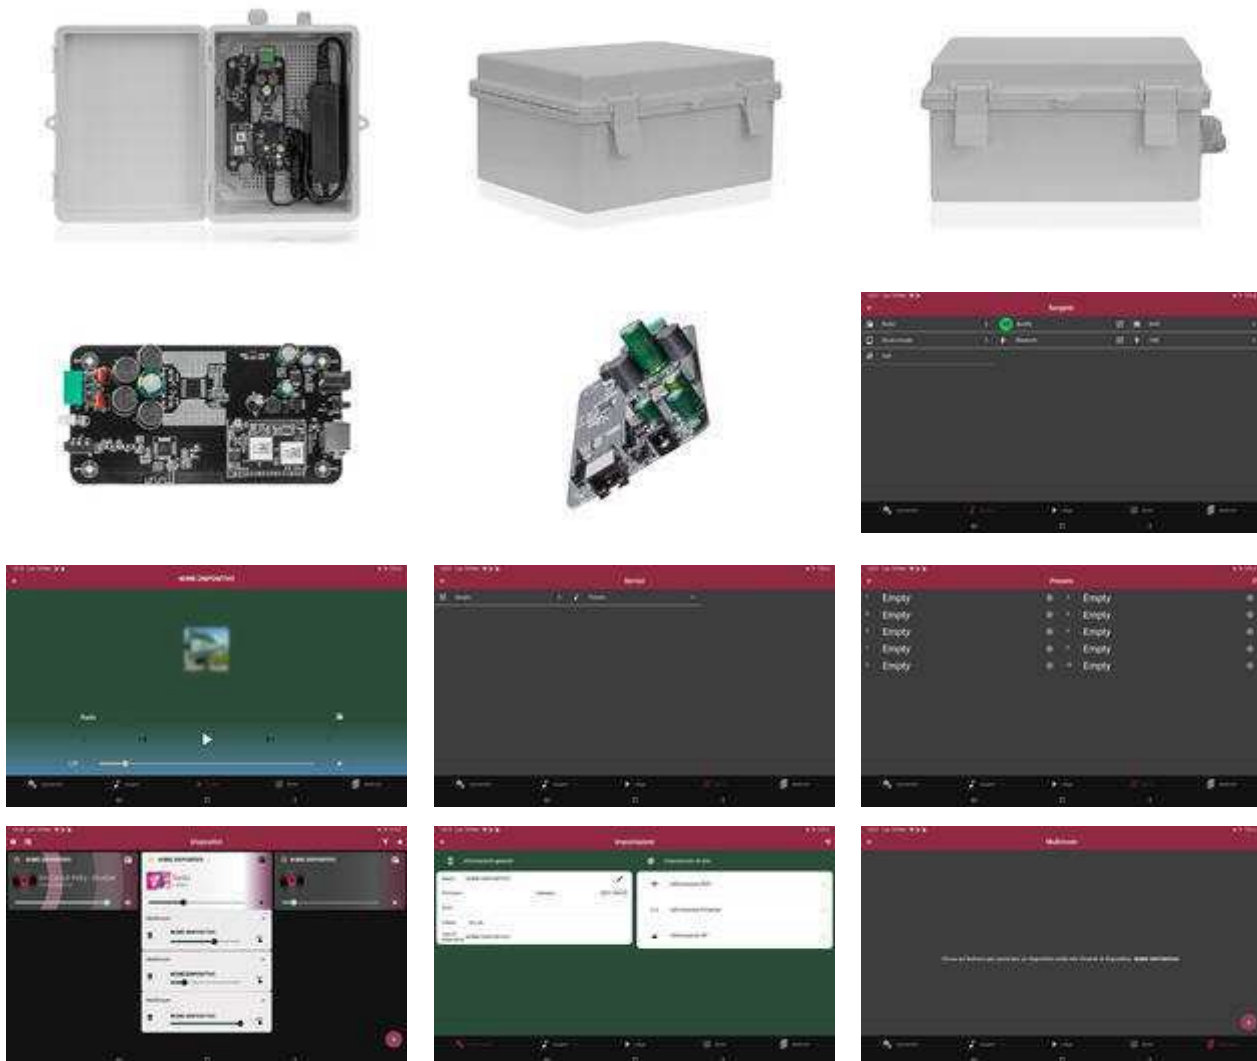

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Wireless & Bluetooth speaker kit for garden and outdoor environment.

Bluetooth streaming from your device (smartphone, pc, tablet ...).

WiFi streaming via VIVALDI APP (iOS, Android) with YouTube, Spotify, Webradio, NAS, etc...

Included:

1) [#Vivaldi WiFi KBOX#](#)

Bluetooth and WiFi amplifier with integrated multimedia player.

With input for external source. Music streaming, playback and controls via VIVALDI APP.

Audio Output: Stereo power amplifier class-D **40+40W @ 8-16ohm**, not compatible with 4ohm speakers.

24vdc power supply included.

IP65 watertight enclosure, for outdoor installation.

Colour: Grey.

3x cable glands included.

Dimensions (WxHxD): 180x230x120 mm.

Weight 0.45 Kg.

1) [Vivaldi Ulisse GREEN16T](#)

Speaker, 2-way coax, **Hi-Fi**, garden **IP56** waterproof.

Woofer: 16,5 cm in polypropylene.

Tweeter: 3 cm titanium with neodymium magnet.

Dimensions (WxH) 365x409 mm.

Colour: Green.

VIVALDI

Cabinet: UV polypropylene.

Dispersion angle: 360° (H)x40° (V).


Working temperature from -20° to +60°.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi WiFi KEYGREEN16A

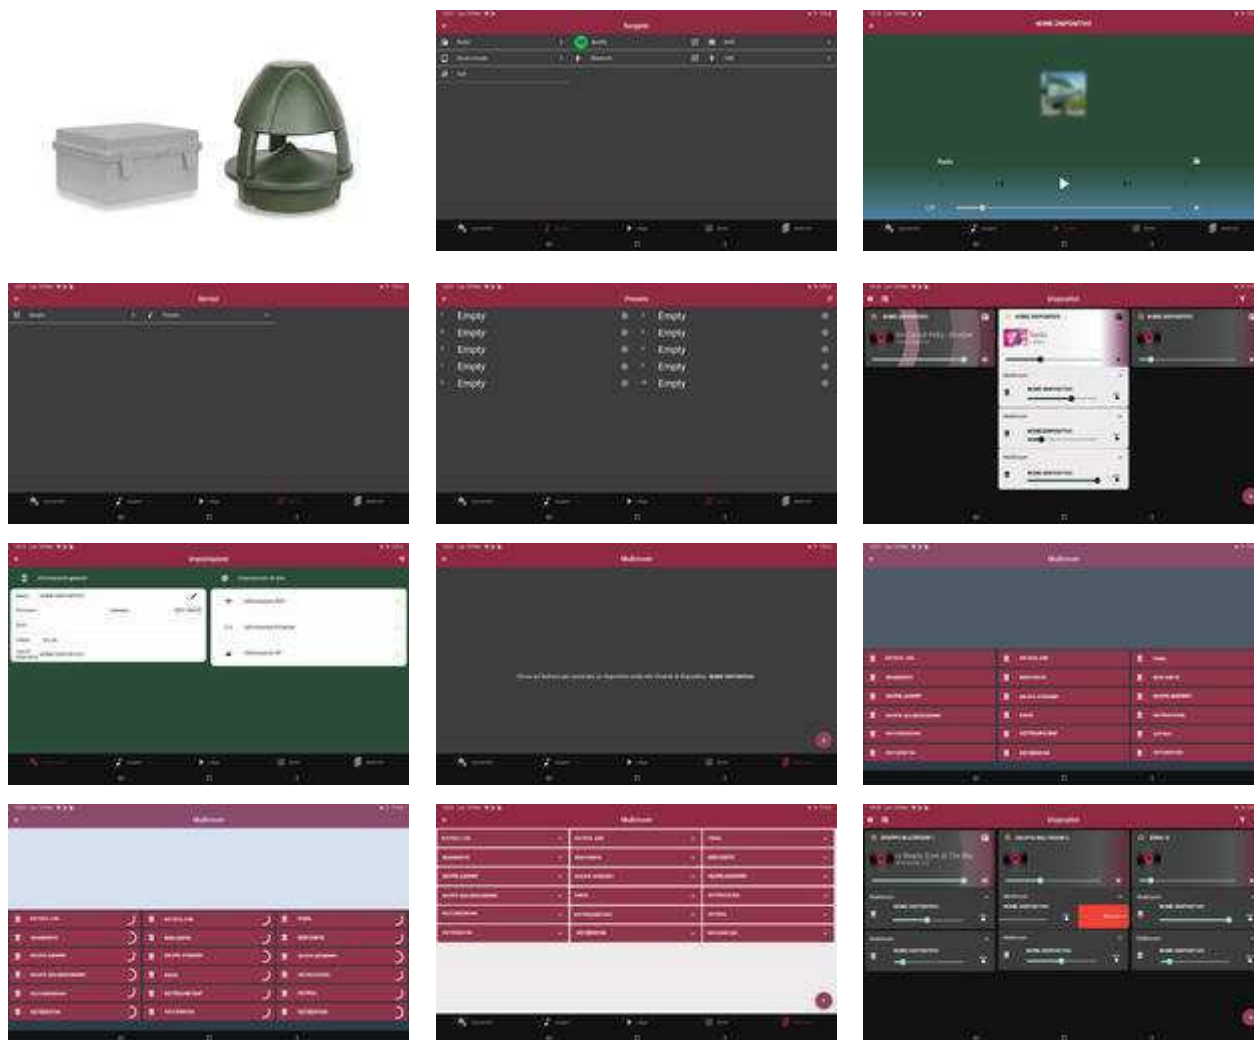

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Wireless & Bluetooth speaker kit for garden and outdoor environment.

Bluetooth streaming from your device (smartphone, pc, tablet ...).

WiFi streaming via VIVALDI APP (iOS, Android) with YouTube (via Airlpay), Spotify, Webradio, NAS, etc...

Included:

1) [#Vivaldi WiFi KBOX#](#)

Bluetooth and WiFi amplifier with integrated multimedia player.

With input for external source. Music streaming, playback and controls via VIVALDI APP.

Audio Output: Stereo power amplifier class-D **40+40W @ 8-16ohm**, not compatible with 4ohm speakers.

24vdc power supply included.

IP65 watertight enclosure, for outdoor installation.

Colur: Grey.

3x cable glands included.

Dimensions (WxHxD): 180x230x120 mm.

Weight 0.45 Kg.

1) [Vivaldi Ulisse ROCK20T](#)

Rock-like speaker, 2-way coax, Hi-Fi, garden IP56 waterproof.

Woofer: 20 cm in polypropylene.

Tweeter: 2,5cm titanium with neodymium magnet.

Dimensions (WxHxD) 440x300x300 mm.

Rock-like grey colour.

VIVALDI

Cabinet: painted fiberglass.

Dispersion angle: 120° (H)x120° (V).


Working temperature from -20° to +60°.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi WiFi KEYROCK20A

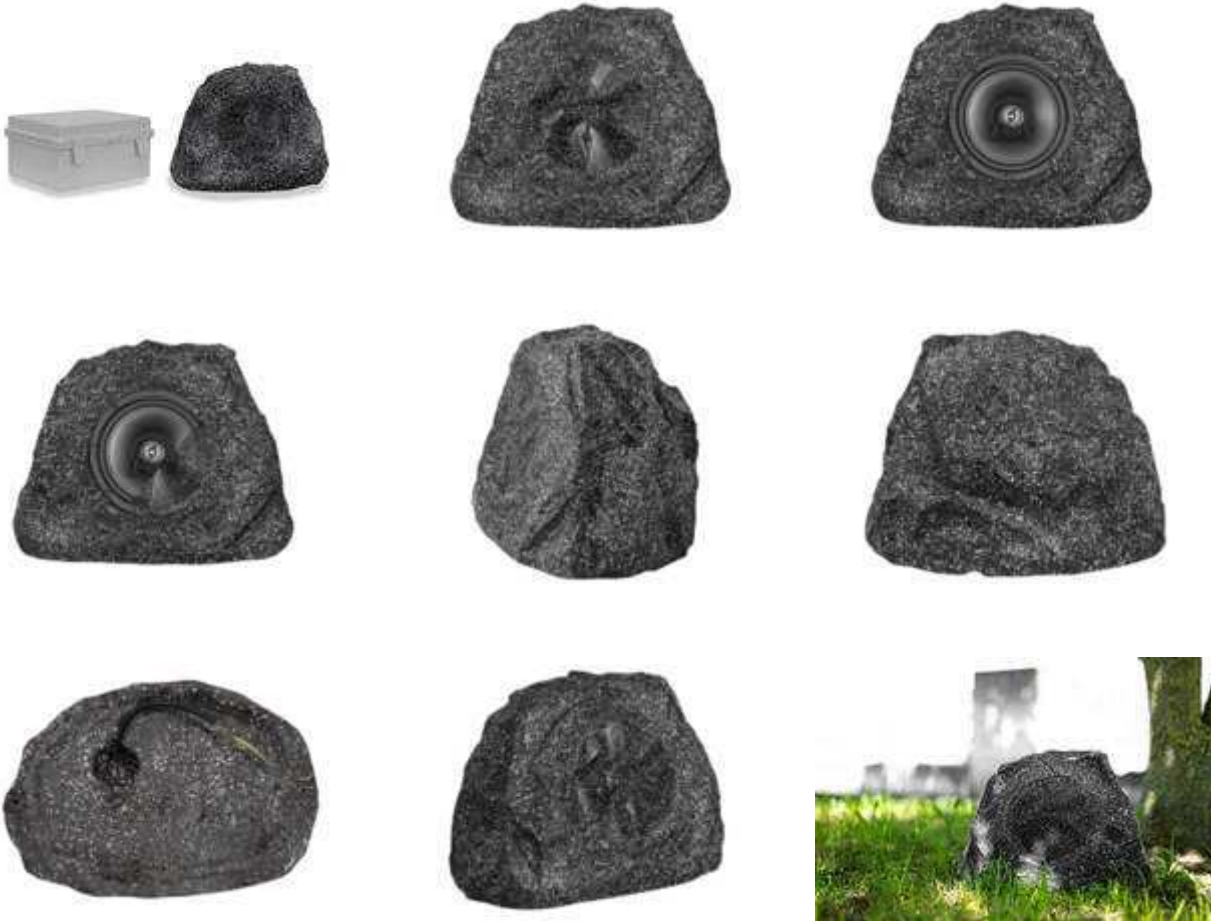

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA

Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it

P.IVA e C.F. 02880360272

VIVALDI



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Wireless & Bluetooth speaker kit for gardens and outdoor environments.

Bluetooth streaming from your device (smartphone, pc, tablet ...).

WiFi streaming via VIVALDI APP (iOS, Android) with YouTube, Spotify, Webradio, NAS, etc...

Included:

1) [#Vivaldi WiFi KBOX#](#)

Bluetooth and WiFi amplifier with integrated multimedia player.

With input for external source. Music streaming, playback and controls via VIVALDI APP.

Audio Output: Stereo power amplifier class-D **40+40W @ 8-16ohm**, not compatible with 4ohm speakers.

24vdc power supply included.

IP65 watertight enclosure, for outdoor installation.

Colour: Grey.

3x cable glands included.

Dimensions (WxHxD): 180x230x120 mm.

Weight 0.45 Kg.

1) [Vivaldi Design ZEN315#](#)

Speaker design , hifi, 2-way, in 316L stainless steel, IP65, for sound broadcasting in outdoor environments (terraces, gardens, swimming pools...).

16.5 cm woofer.

2.5cm dome tweeter.

Dimensions 205 x 315 mm (WxH).


Anchor flange 30 cm (D).
Anchoring holes nr. 3.
Weight 7 Kg.
Colour brushed steel.
Color customization on request.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi WiFi KEYZEN315A

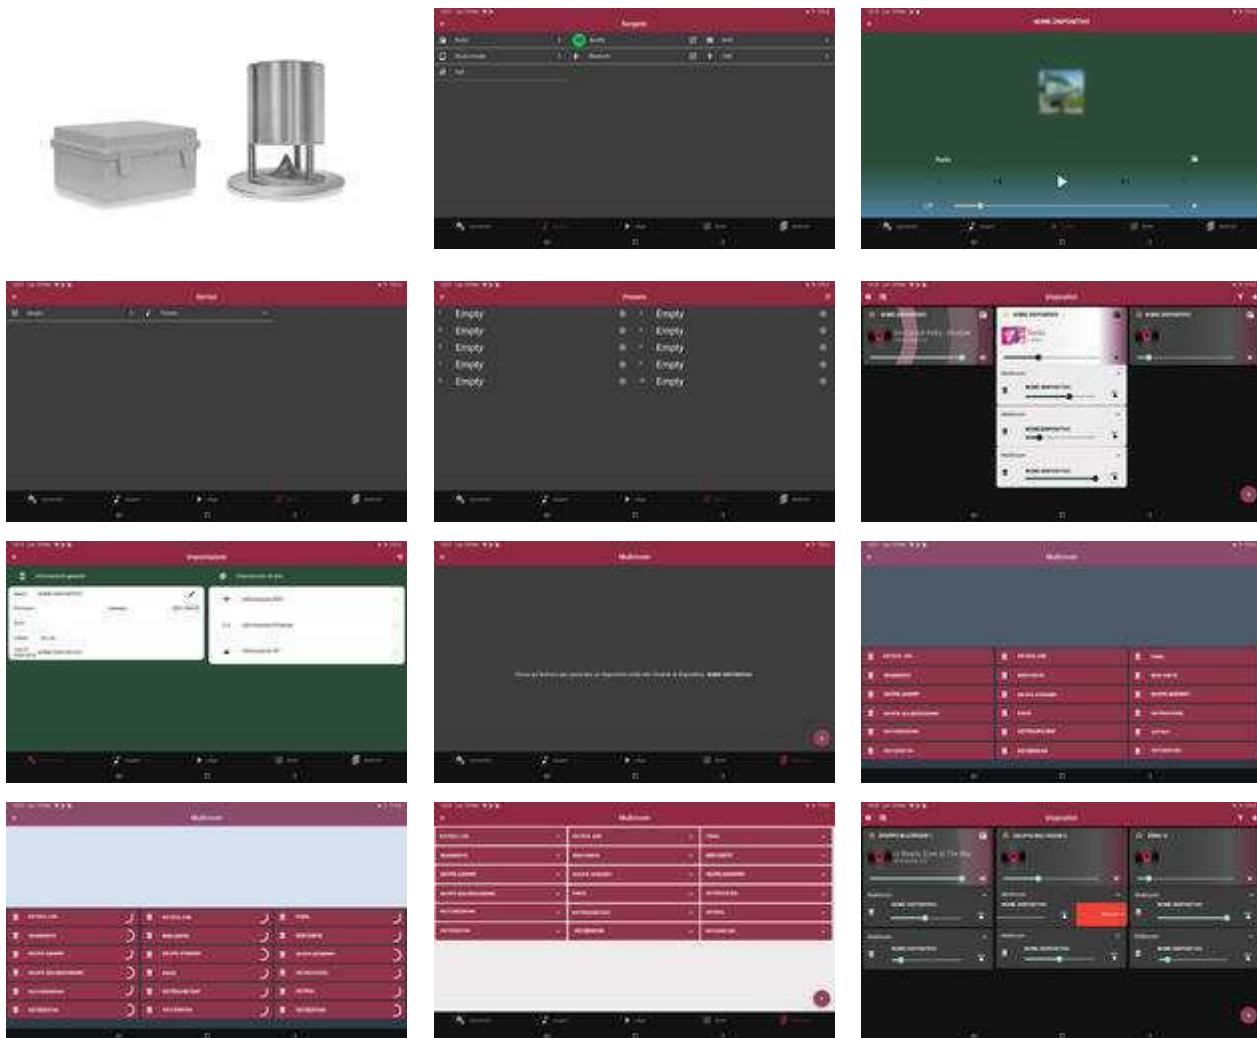



Wireless & Bluetooth speaker kit for gardens and outdoor environments.

Bluetooth streaming from your device (smartphone, pc, tablet ...).

WiFi streaming via VIVALDI APP (iOS, Android) with YouTube (via Airplay), Spotify, Webradio, NAS, etc...

Included:

1) [#Vivaldi WiFi KBOX#](#)

Bluetooth and WiFi amplifier with integrated multimedia player.

With input for external source. Music streaming, playback and controls via VIVALDI APP.

Audio Output: Stereo power amplifier class-D **40+40W @ 8-16ohm**, not compatible with 4ohm speakers.

24vdc power supply included.

IP65 watertight enclosure, for outdoor installation.

Colour: Grey.

3x cable glands included.

Dimensions (WxHxD): 180x230x120 mm.

Weight 0.45 Kg.

1) [Vivaldi Design ZEN510#](#)

Speaker design, with integrated LED lighting, hifi, 2-way, in 316L stainless steel, IP65, for sound broadcasting in outdoor environments (terraces, gardens, swimming pools...).

66 Led, 13,8W, 1380lm, 3800K.

16.5 cm woofer.

2.5cm dome tweeter.

VIVALDI

Dimensions 205 x 510 mm (WxH).

Anchor flange 30 cm (D).

Anchoring holes nr. 3.

Weight 8,2 Kg.


Colour brushed steel.

Color customization on request.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images

Vivaldi WiFi KEYZEN510A

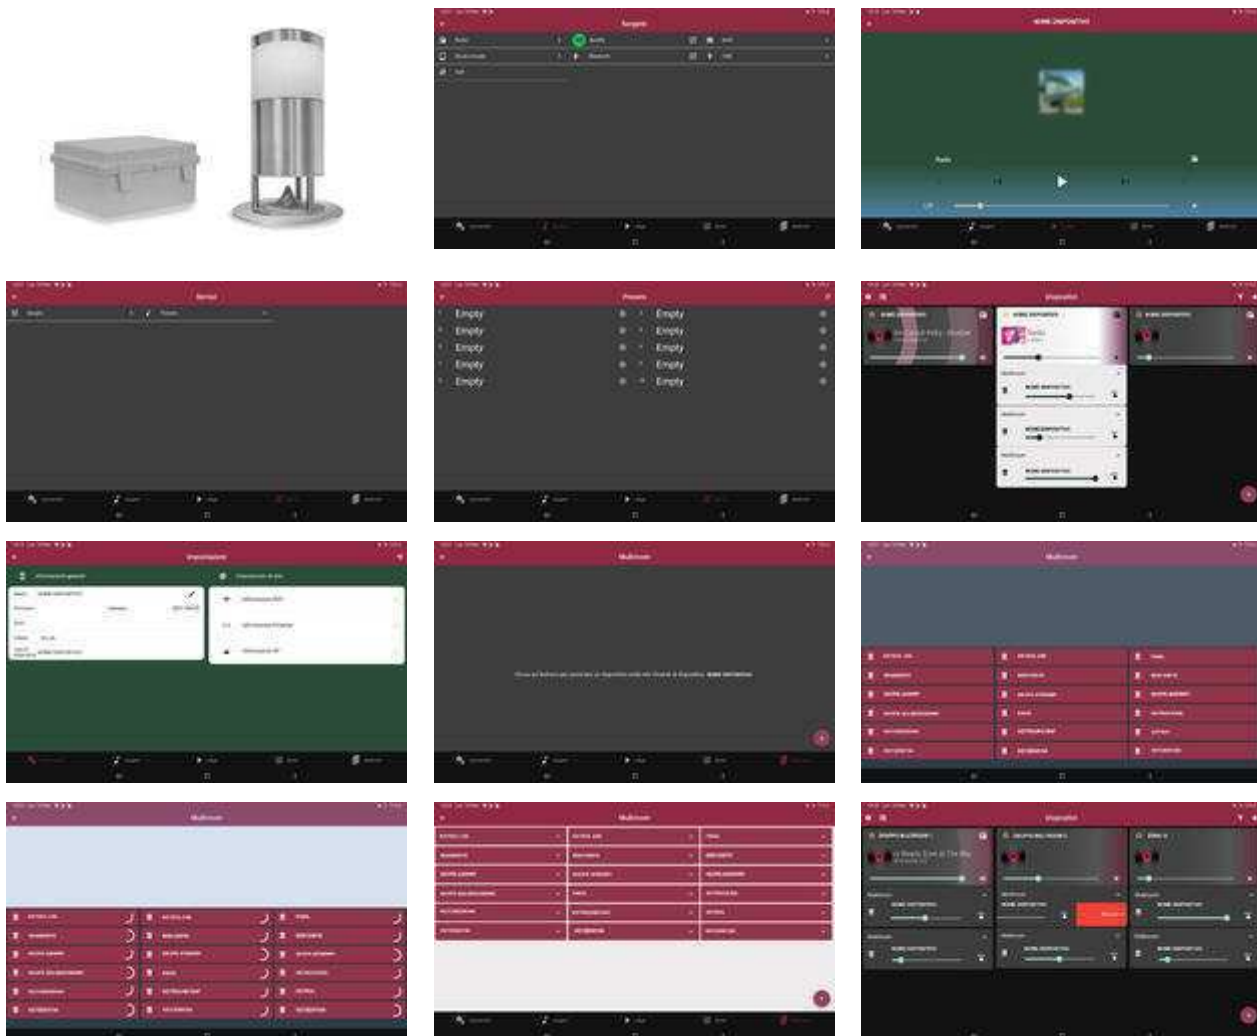

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA

Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it

P.IVA e C.F. 02880360272

VIVALDI

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



Wireless & Bluetooth speaker kit for gardens and outdoor environments.

Bluetooth streaming from your device (smartphone, pc, tablet ...).

WiFi streaming via VIVALDI APP (iOS, Android) with YouTube, Spotify (via Airplay), Webradio, NAS, etc...

Included:

1) [#Vivaldi WiFi KBOX#](#)

Bluetooth and WiFi amplifier with integrated multimedia player.

With input for external source. Music streaming, playback and controls via VIVALDI APP.

Audio Output: Stereo power amplifier class-D **40+40W @ 8-16ohm**, not compatible with 4ohm speakers.

24vdc power supply included.

IP65 watertight enclosure, for outdoor installation.

Colour: Grey.

3x cable glands included.

Dimensions (WxHxD): 180x230x120 mm.

Weight 0.45 Kg.

1) [Vivaldi Design ZEN730#](#)

Speaker design , hifi, 2-way, in 316L stainless steel, IP65, for sound broadcasting in outdoor environments (terraces, gardens, swimming pools...).

16,5 cm woofer.

2,5cm dome tweeter.


Dimensions 205 x 725 mm (WxH).

Anchor flange 30 cm (D).
Anchoring holes nr. 3.
Weight 12,5 Kg.
Colour brushed steel.
Color customization on request.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice

Images

Vivaldi WiFi KEYZEN730A

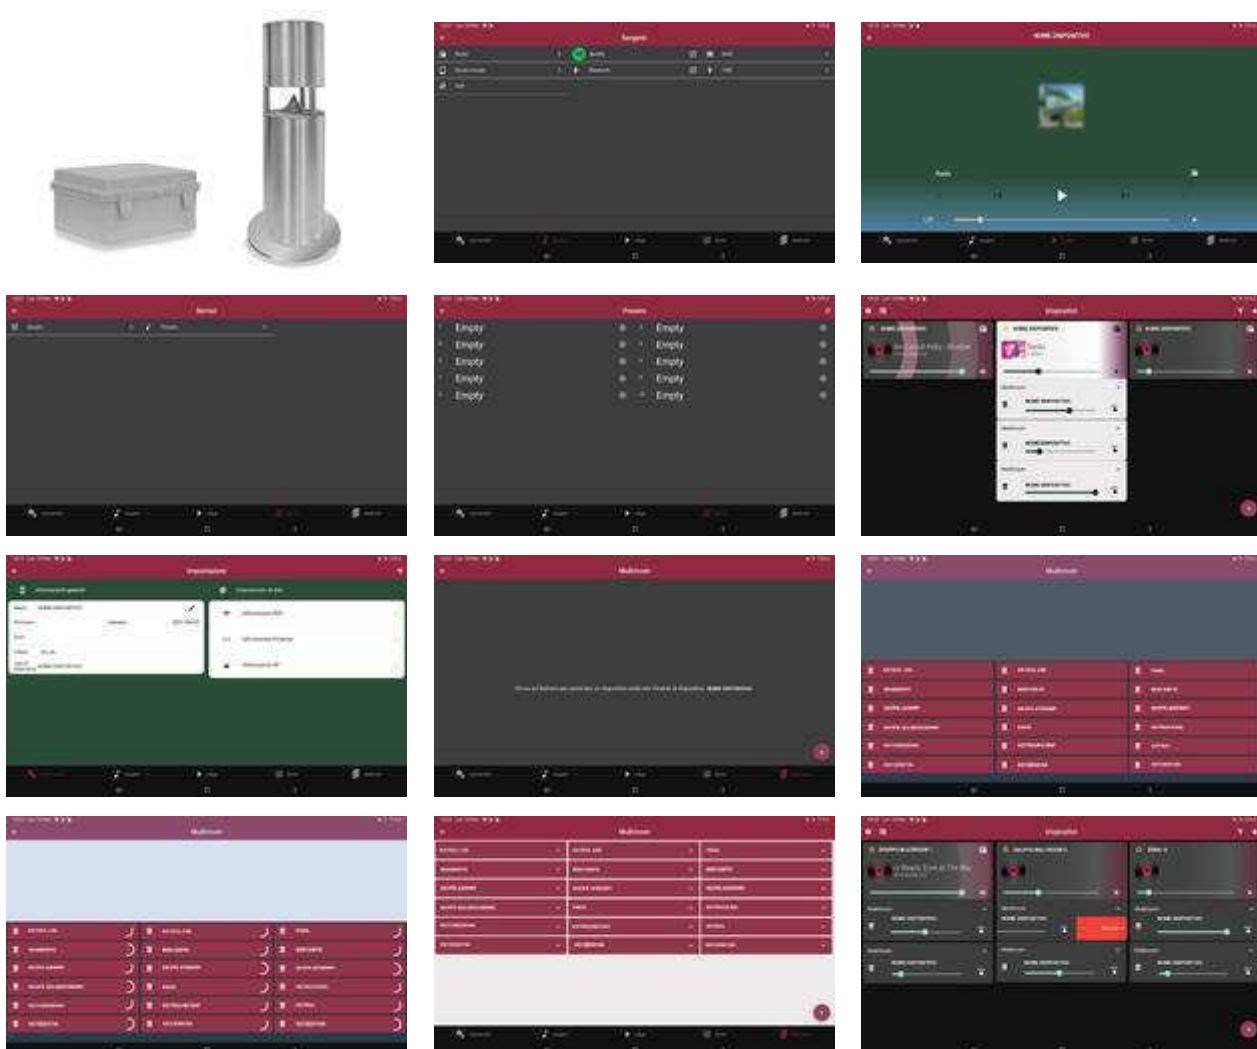



Design speaker, HiFi, 3000W, ACTIVE, 3-way with DSP, in 316L stainless steel, IP65, with integrated subwoofer for sound diffusion and outdoor furniture (terraces, gardens, swimming pools ...).

Subwoofer 2x26,5 cm push-pull.

Woofer 26.8cm coax, neodymium.

Tweeter 4.4cm compression, titanium.

Woofer power 2000W RMS.

Average power 600W.

Tweeter power 100W.

Frequency response 40-20000Hz.

Max output level full power 126dB, 129 peak.

Input sensitivity 1.5V RMS.

Power supply 220V/50-60Hz.

Dimensions 306 x 1220 mm (DxH).

Anchor flange 40 cm (D).

Anchor holes nr. 3.

Weight 46 Kg.

Brushed steel color. Color customization on request.

IP65 protection.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without





Speaker, 2-way coax, **Hi-Fi**, IP65* waterproof.

Woofer: 20.5 cm.

Tweeter: 2.5 cm.

Nominal power at 100V: 15/30/60W RMS. 120 peak, max. 108dB.

Nominal power at 70V: 15/30/60W RMS. 120 peak.

8Ω power: 80W RMS, 160W musical.

Recommended amplification: 10 to 100W RMS

Impedance: 70V/100V - 8Ω selectable

Frequency response 55-20000 Hz.

Sensitivity: 90dB. Max 108dB 1W/1mt.

Dimensions (DxH) 380x450 mm.

Weight 3.8Kg.

Colour smoke grey RAL7021 or bronze brown RAL8014.

Cabinet: UV polypropylene.


Degree of protection: IP65.

Angle of dispersion: 360°(H)x40°(V).

Working temperature: -20° to +60°.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



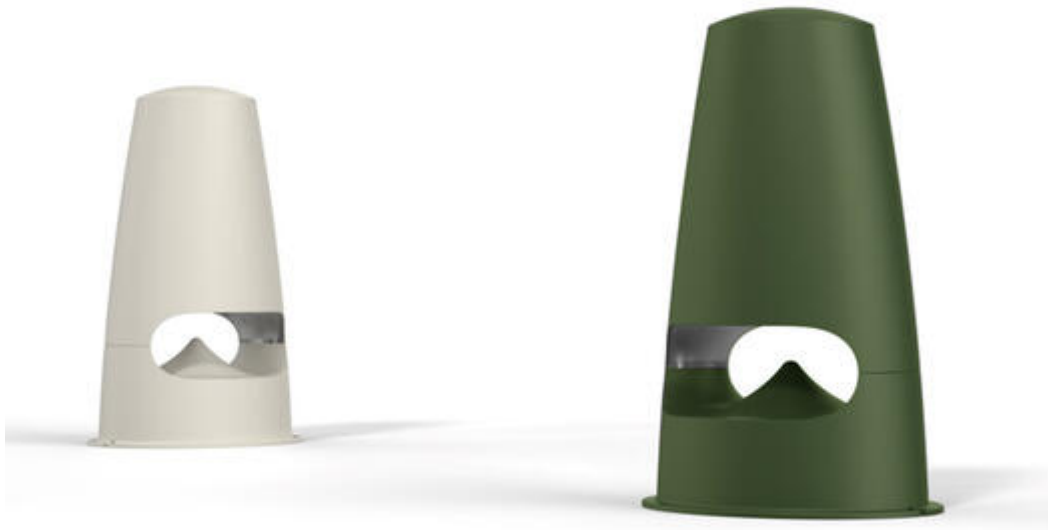

Speaker, 2-way coax, **Hi-Fi**, **IP65*** waterproof.

LED technology.

69 points.

Watt 3.15.

Ansi Lumen 104.6L/m.

Temperature 3500K.

Power supply 12V 0.34A.

Dispersion 270°.

Warm white colour.

Woofer: 16.5 cm.

Tweeter: 2.5 cm.

Rated power at 70/100V: 7.5/15/30W RMS. 60 peak, max 97dB.

Power 8Ω: 40W RMS, 80W musical.

Recommended amplification: 10 to 60W RMS.

Impedance: 70V/100V - 8Ω selectable.

Frequency response 70-20000 Hz.

Sensitivity: 79dB. Max 97dB 1W/1mt.

Dimensions (WxHxD) 330x555x270 mm.

LED power supply (included).

VIVALDI

Weight 3.8kg.

Sand colour - RAL1013.

Cabinet: ABS polypropylene.

Degree of protection: IP65.

Dispersion angle: 360°(H)x40°(V).

Working temperature: -20° to +60°.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Ulisse MOONLIGHT



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA

Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it

P.IVA e C.F. 02880360272

Altavoces pared



Professional loudspeaker, **Hi-Fi** version, 3-way, with subwoofer.

IP66 protection. Ideal for outdoor applications even in marine areas. Resistant to corrosive agents such as chlorine and salt spray.

Provided with bracket for wall mounting.

Elliptical convex passive subwoofer 9x13 cm (WxH).

Woofer 10 cm polypropylene, graphite finish.

Tweeter 2.5 cm dome, neodymium and silk.

Dispersion angle 105°Vx90°H (120° up to 3 KHz).

Nominal power at 100V: 2.5/5/10/20W. 40W peak, max 100dB.

Power 8 Ω : 40W RMS, 80W musical.

Recommended amplification 10 to 60W RMS.

Impedance 8 Ω - 100V selectable.

Frequency response 65-20000 Hz.

Sensitivity 82 dB.

Max output level / full power 105 dB.

Dimensions (WxHxD) without bracket 140x212x140 mm.

Dimensions (WxHxD) with bracket 140x212x175 mm.

Weight 2.1 kg.

ABS enclosure, bracket and grille in painted aluminium.

Available colours white RAL 9003 with edges RAL7035 ([Vivaldi Ulisse ANNA10TW](#)) and black RAL9005 ([Vivaldi Ulisse ANNA10TB](#)).

VIVALDI

Working temperature -20° to +80°.

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images

Vivaldi Ulisse ANNA10T



Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272



loeq@loeq.es

www.loeq.es

LIGHT & SOUND EQUIPMENT SL
C/Mossèn Jaume Bonet, 1
25690, Vilanova de la Barca, Lleida