

BT-CAN

CAN to Bluetooth adapter


This module is used to connect to remote devices via Bluetooth.



Module parameters

Parameter name	Value
Power supply	11.5 ... 27.5 V DC from CAN or PS
Max current(24V)	30 mA
Max BT distance	220 m
Bus type	CAN (4-wire)
Equipment installation type	Free
Case material	ABS
Protection	IP40
Temperature range	-10 ... +50 °C
Size	45x42x14 mm
Weight	25 g

Connection example

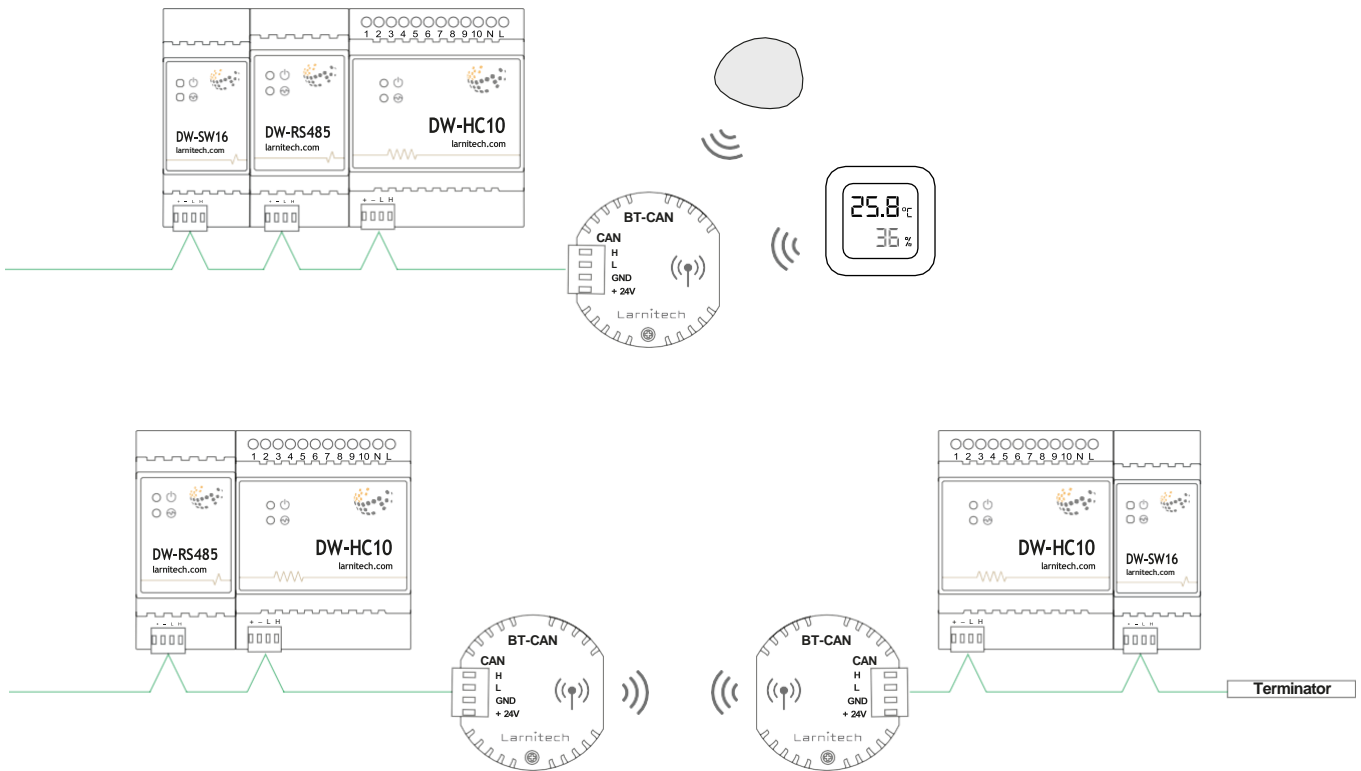

CW-MLI / CW-M

MICRO-SIZED 3 IN 1 SENSOR

This module contains motion, lighting (CW-MLI only) sensors and an IR transmitter (CW-MLI only).



Module parameters

Parameter name	Value
Control parameters	Motion, lighting(optional)
Angle of vision IR	360°
Power supply	11.5 ... 27.5 V DC from CAN
Max current(24V)	50 mA
Max IR distance	3 meters*
Bus type	CAN (4-wire)
Mounting	Cell
Protection	IP40
Temperature range	-10 ... +50 °C
Size	17x17x60 mm
Weight	15 g

* Depends on many factors, such as the sensitivity of the IR receiver, the reflectivity of surfaces etc. Recommended distance up to 3 meters

Connection example

