

BT-CAN

CAN to Bluetooth adapter


This module is used to connect to remote devices via Bluetooth.



Module parameters


Parameter name	Value
Power supply	11.5 ... 27.5 V DC from CAN or PS
Max current(24V)	30 mA
Max BT distance	220 m
Bus type	CAN (4-wire)
Equipment installation type	Free
Case material	ABS
Protection	IP40
Temperature range	-10 ... +50 °C
Size	45x42x14 mm
Weight	25 g

Connection example

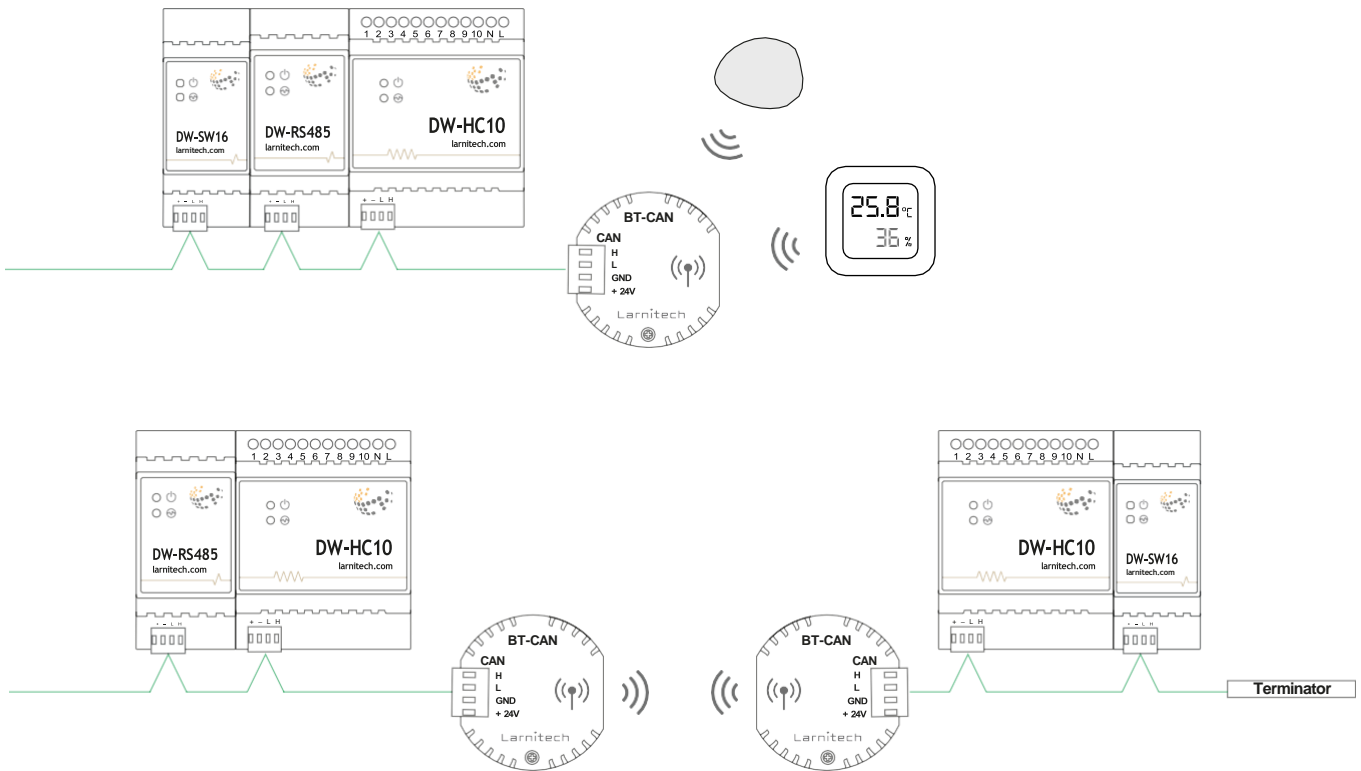

WW-WL WALL LEAKAGE SENSOR

The sensor is placed on the wall. Used together with DW-WL02 or BW-LSA modules.

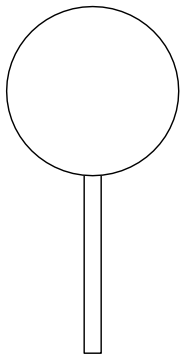

Module parameters

Parameter name	Value
Power supply	9-12 V DC
Max current(24V)	20 mA
Compatible with	Metafora devices DW-WL02/HTxx BW-LSA
Equipment installation type	Free
Case material	ABS
Protection	IP64
Temperature range	-10 ... +50 °C
Size	57x47x22 mm
Weight	35g

FEATURES

- Sensor presence detection
- Adjusting the sensor sensitivity
- Connections of several sensors to one bus

Connection example

