

BT-CAN

CAN to Bluetooth adapter


This module is used to connect to remote devices via Bluetooth.



Module parameters



Parameter name	Value
Power supply	11.5 ... 27.5 V DC from CAN or PS
Max current(24V)	30 mA
Max BT distance	220 m
Bus type	CAN (4-wire)
Equipment installation type	Free
Case material	ABS
Protection	IP40
Temperature range	-10 ... +50 °C
Size	45x42x14 mm
Weight	25 g

Connection example

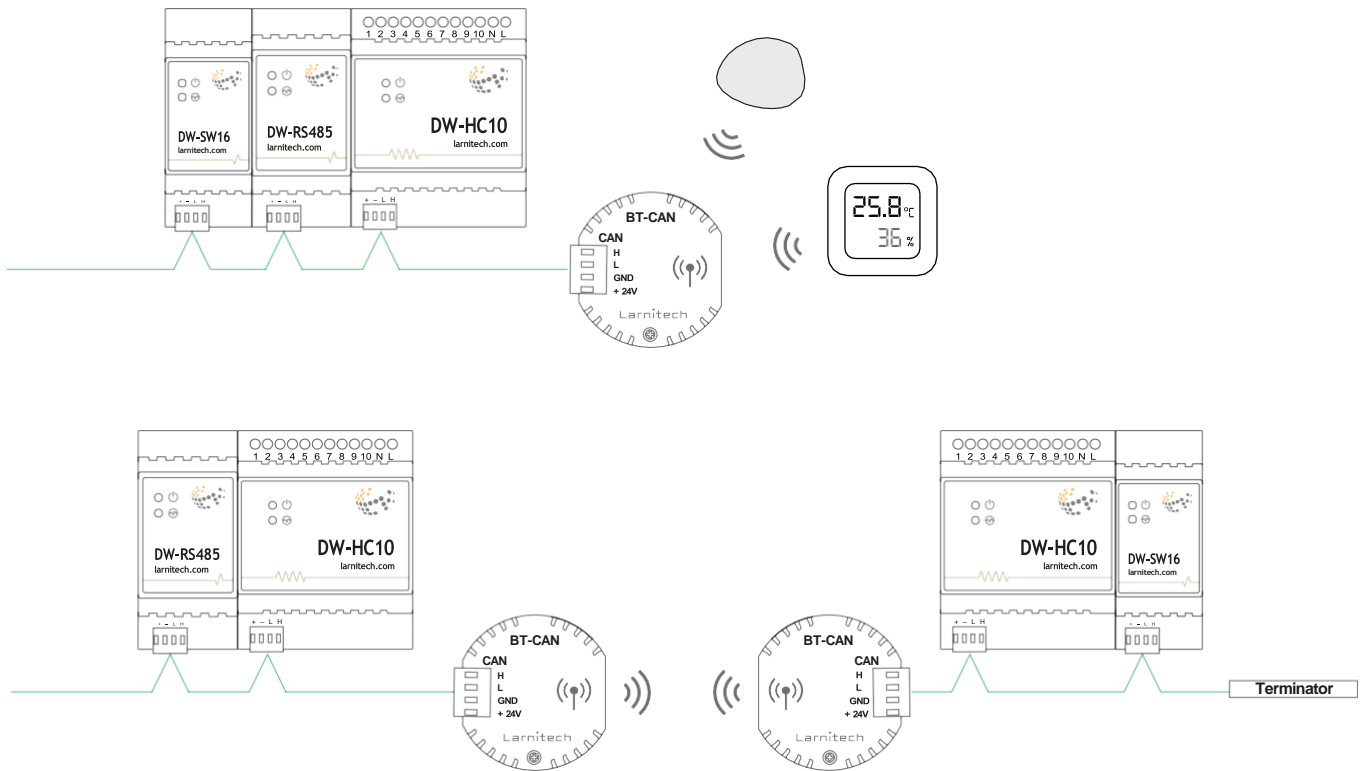

LCP4

WALL-MOUNTED CONTROL PANEL

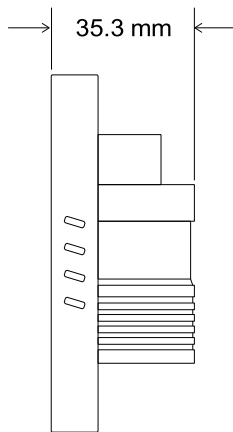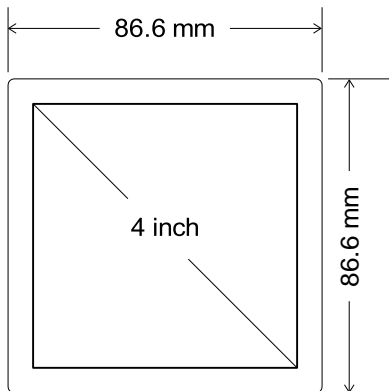

Module parameters

Parameter name	Value
Dimension	86.6mm*86.6mm*35.3mm
Display size	4 inch
CPU	Quad-core cortex-A7 ,1.2Ghz
System	Android 7.1
Resolution	480*480
Touch Panel	5 points capactive touch panel, IPS
RAM	1G
Rom	8G
WIFI	802.11b/g/n
Bluetooth	BT 4.0
Ethernet	10M/100M
RJ45	Ethernet interface input (RJ-45 cable)
Power suply	AC 110-240V , 50HZ
Microphone	build in
Camera	No camera
Battery	NO
Mount	wall mounted / in wall & embedded
Color	Black
Power consumption	20W
Physical button	Power on/ off
Working temperature	-5..70°C
Language	Multi-language